Product datasheet

KOMBIC 100 SURFACE

LAMP
Worktitude for light

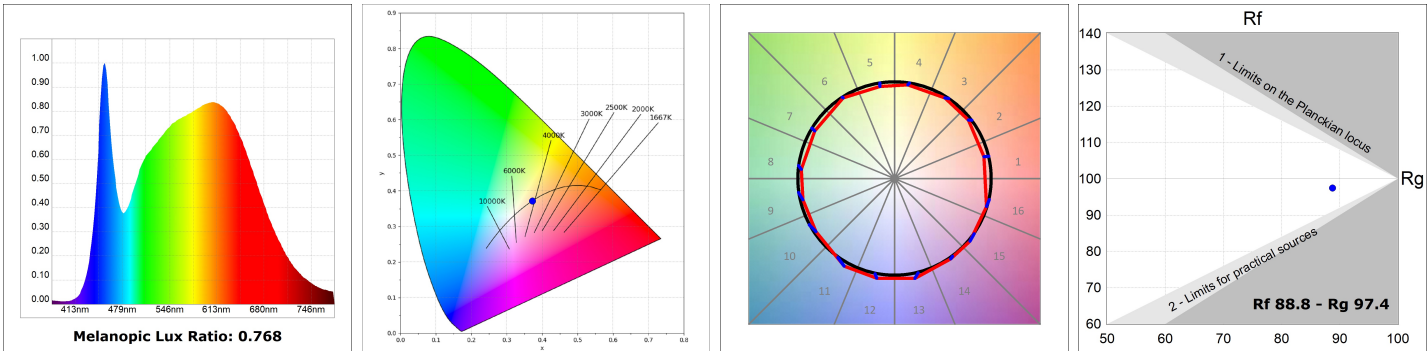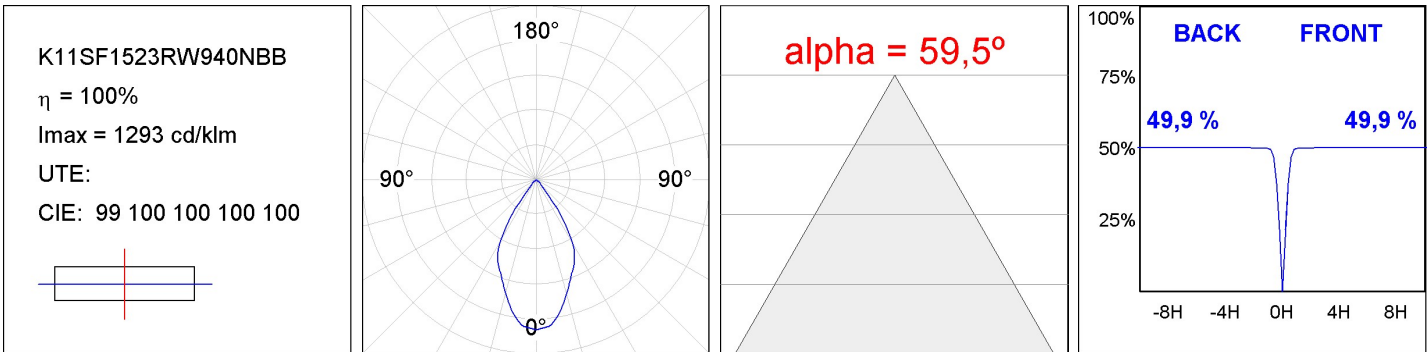**K11SF1523RW940NBB**   **-**   **KOMBIC 100 SF 1500 IP23 9NW RF WFL BK/BK**

Description:

Finish: Matte black RAL 9011

Weight: 502   g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.299 lm	**ºK :**	4000
Plum:	14,1W	**CRI :**	90
Efficacy:	92,1 lm/w	**R9 :**	65
UGR:	<19	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Electronic
Power:	13W		

Light output tolerance +/- 10%

EPD

LAMP
Worktitude for light

K11SF1523RW940NBB   **KOMBIC 100 SF 1500 IP23 9NW RF WFL BK/BK**

PHOTOMETRIC DATA :

K11SF1523RW940NBB

η = 100%

Imax = 1293 cd/klm

UTE:

CIE: 99 100 100 100 100

alpha = 59,5º

BACK   FRONT

49,9 %   49,9 %

Melanopic Lux Ratio: 0.768

Rf 88.8 - Rg 97.4

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

12-03-2025

Pág.   2 / 3

Data according to regulations 2019/2020/EU and 2019/2015/EU

ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

12-03-2025

Pág.   3 / 3