

KOMBIC 100 SURFACE

K11SF1523RW940NMW

- KOMBIC 100 SF 1500 IP23 9NW RF WFL MA/WH

Description:**Finish:** metalized polycarbonate mate**Weight:** 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.406 lm	°K :	4000
Plum:	14,1W	CRI :	90
Efficacy:	99,7 lm/w	R9 :	65
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Electronic

Light output tolerance +/- 10%




KOMBIC 100 SURFACE

K11SF1523RW940NMW

KOMBIC 100 SF 1500 IP23 9NW RF WFL MA/WH

PHOTOMETRIC DATA :

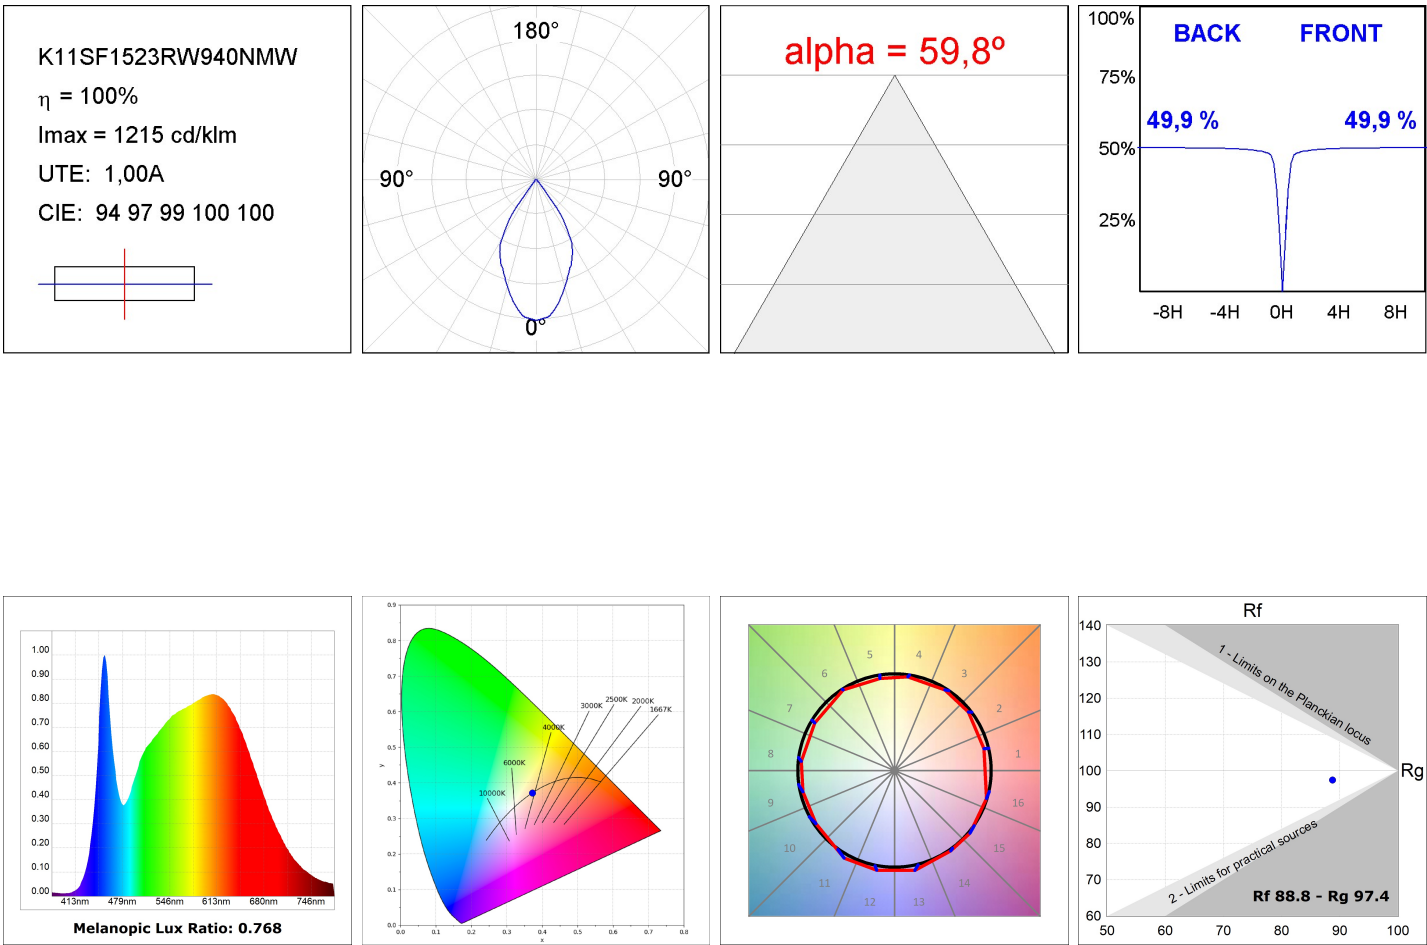

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH