


KOMBIC 100 SURFACE

K11SF1540OP930DWW




KOMBIC 100 SF 1500 IP43 9WW OP DA WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 720 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.224 lm	°K :	3000
Plum:	13,7W	CRI :	90
Efficacy:	89,3 lm/w	R9 :	68
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12W	Gear:	Adjustable DALI

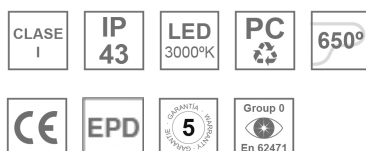
Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF1540OP930DWW

KOMBIC 100 SF 1500 IP43 9WW OP DA WH/WH

PHOTOMETRIC DATA :

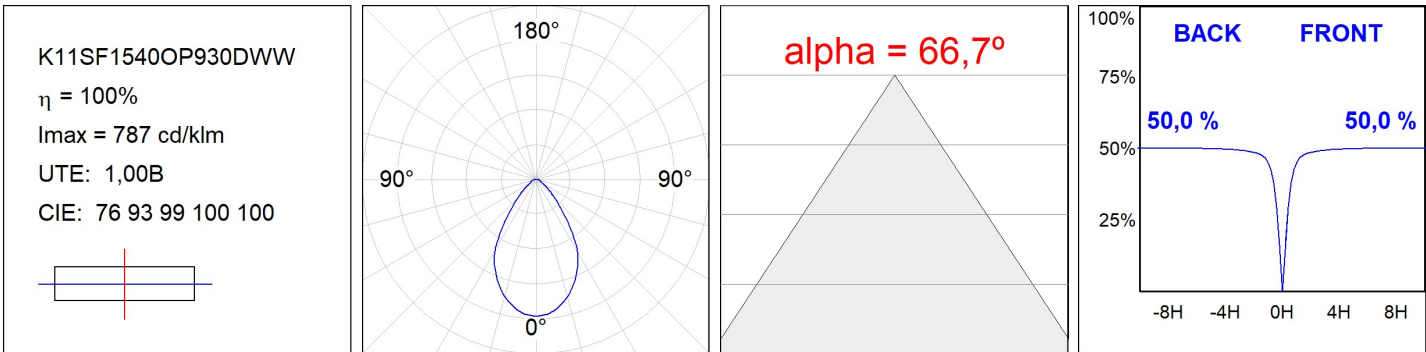

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH