

KOMBIC 100 SURFACE

K11SF1540OP940DWB




KOMBIC 100 SF 1500 IP43 9NW OP DA WH/BK

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF 1500 IP43 9NW OP DA WH/BK. LAMP brand. Body made of black aluminum extrusion with white polycarbonate reflector and optical film. Injected aluminum heat sink. Model for COB LED, with 3000K temperatur, CRI90 and control DALI gear included. IP43 protection rating. Insulation class I. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 498 g




Installation: Surface

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.330 lm | °K : | 4000 |
| Plum: | 13,7W | CRI : | 90 |
| Efficacy: | 97,1 lm/w | R9 : | 66 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 12W | Gear: | Adjustable DALI |

Light output tolerance +/- 10%

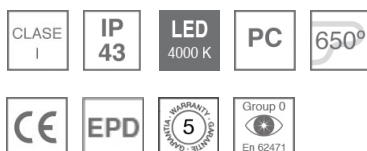

CUSTOM MADE OPTIONS:



KOMBIC 100 SURFACE

K11SF1540OP940DWB

KOMBIC 100 SF 1500 IP43 9NW OP DA WH/BK

PHOTOMETRIC DATA :

