

## KOMBIC 100 SURFACE


K11SF1540OP940DWB



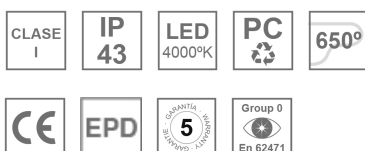
## KOMBIC 100 SF 1500 IP43 9NW OP DA WH/BK

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 100 SF 1500 IP40 9NW OP DA WH/BK. LAMP brand. Body made of black aluminum extrusion with white polycarbonate reflector and optical film. Injected aluminum heat sink. Model for COB LED, with 3000K temperature, CRI90 and control DALI gear included. IP43 protection rating. Insulation class I. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Weight:** 498 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.330 lm	<b>°K :</b>	4000
<b>Plum:</b>	13,7W	<b>CRI :</b>	90
<b>Efficacy:</b>	97,1 lm/w	<b>R9 :</b>	66
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	12W	<b>Gear:</b>	Adjustable DALI

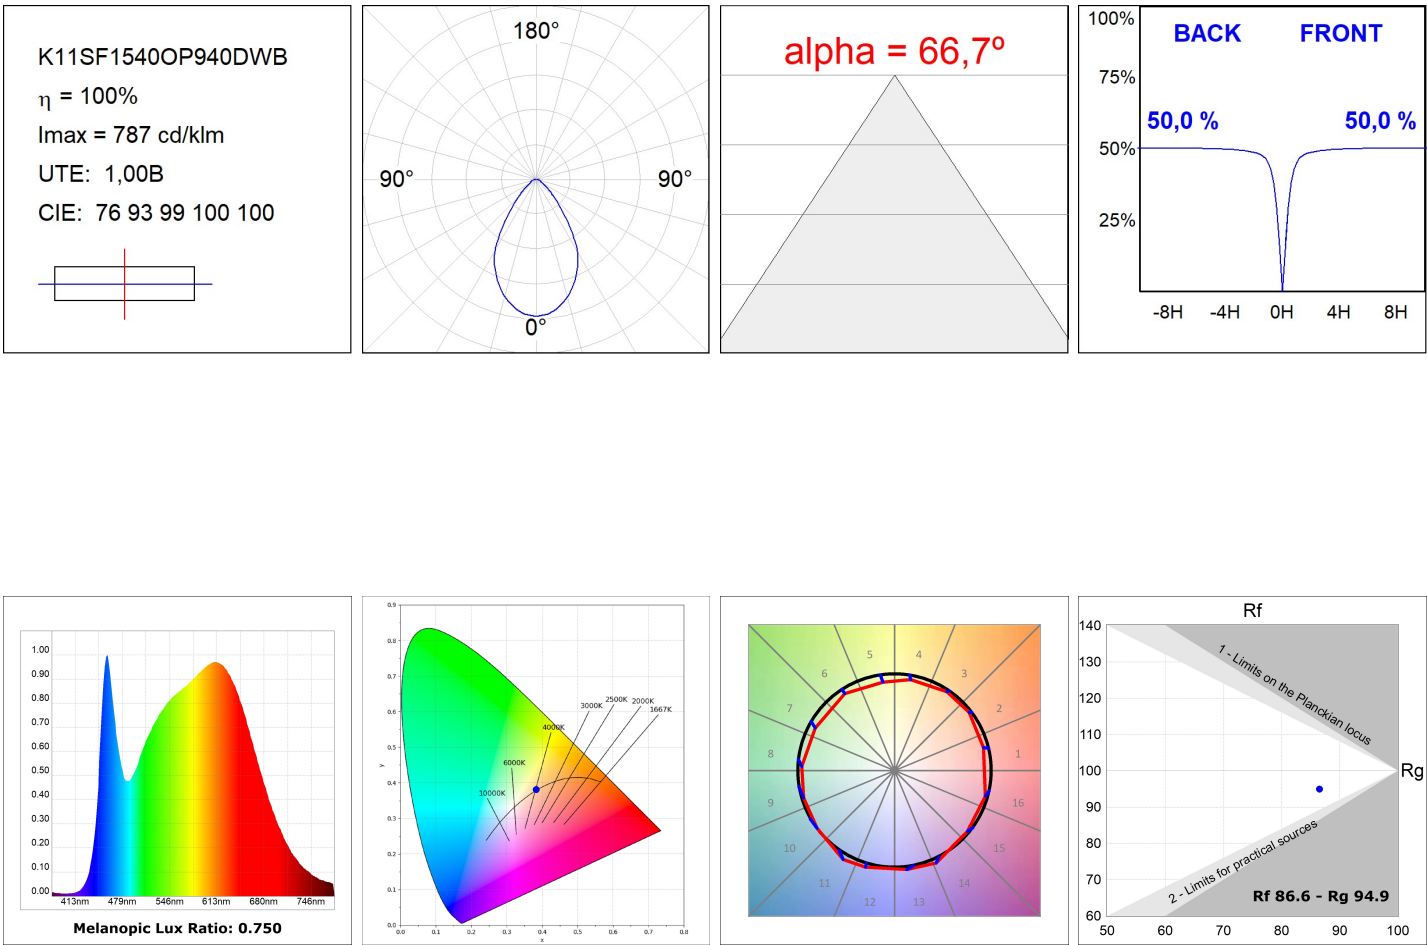
**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF1540OP940DWB

KOMBIC 100 SF 1500 IP43 9NW OP DA WH/BK

PHOTOMETRIC DATA :



KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:  
K11SUADLATBK

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:  
K11SUADLATWH

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH