


KOMBIC 100 SURFACE

K11SF1540OP940NRW




KOMBIC 100 SF 1500 IP43 9NW OP BR/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K, CRI90 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE**Weight:** 498 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Plum:	13,7W	°K :	4000
Type:	COB	CRI :	90
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	R9 :	66
Power:	12W	MacAdam:	3
		Power Supply:	220-240V 50/60Hz
		Gear:	Electronic

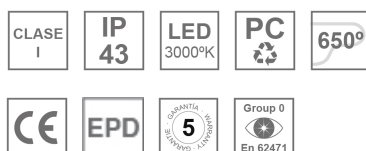**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH