


KOMBIC 100 SURFACE

K11SF1540PWB3NRB



KOMBIC 100 SF 1200 IP43 WBW OP BR/BK

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE**Weight:** 498 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|----------------------|----------------------|------------------|
| Light output: | 971 lm | °K : | 3000 |
| Plum: | 13,9W | CRI : | 95 |
| Efficacy: | 69,8 lm/w | R9 : | 99 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 60.000 L80 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 11,8W | Gear: | Electronic |


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF1540OPWB3NRB

KOMBIC 100 SF 1200 IP43 WBW OP BR/BK

PHOTOMETRIC DATA :

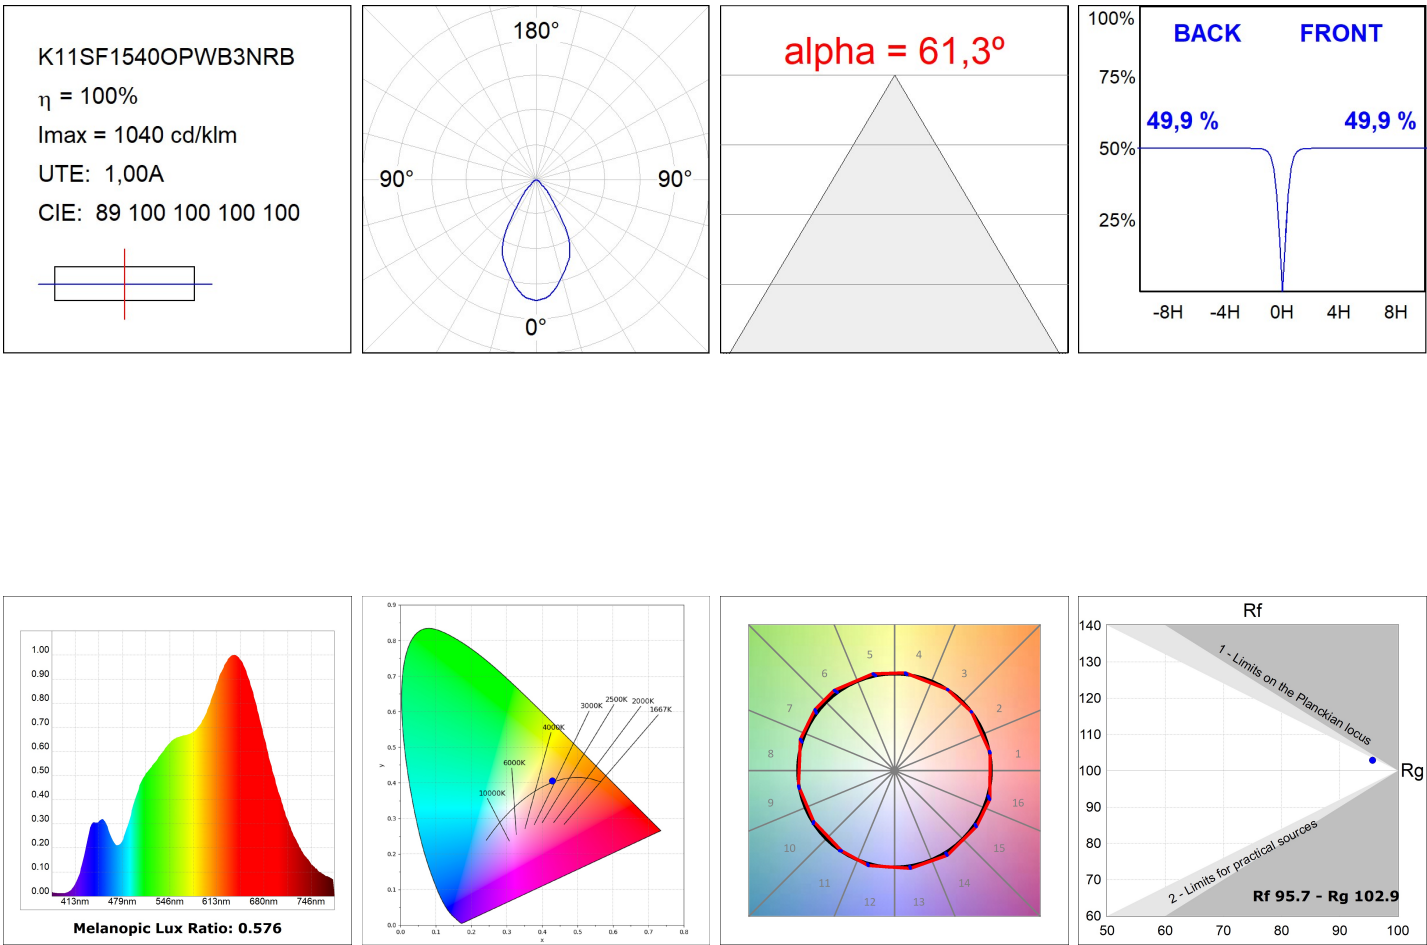

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH