


KOMBIC 100 SURFACE

K11SF1540PWB3NRW



KOMBIC 100 SF 1200 IP43 WBW OP BR/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE**Weight:** 498 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	971 lm	°K :	3000
Plum:	13,9W	CRI :	95
Efficacy:	69,8 lm/w	R9 :	99
Type:	COB	MacAdam:	3
LED Lifetime:	60.000 L80 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	11,8W	Gear:	Electronic


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF1540OPWB3NRW

KOMBIC 100 SF 1200 IP43 WBW OP BR/WH

PHOTOMETRIC DATA :

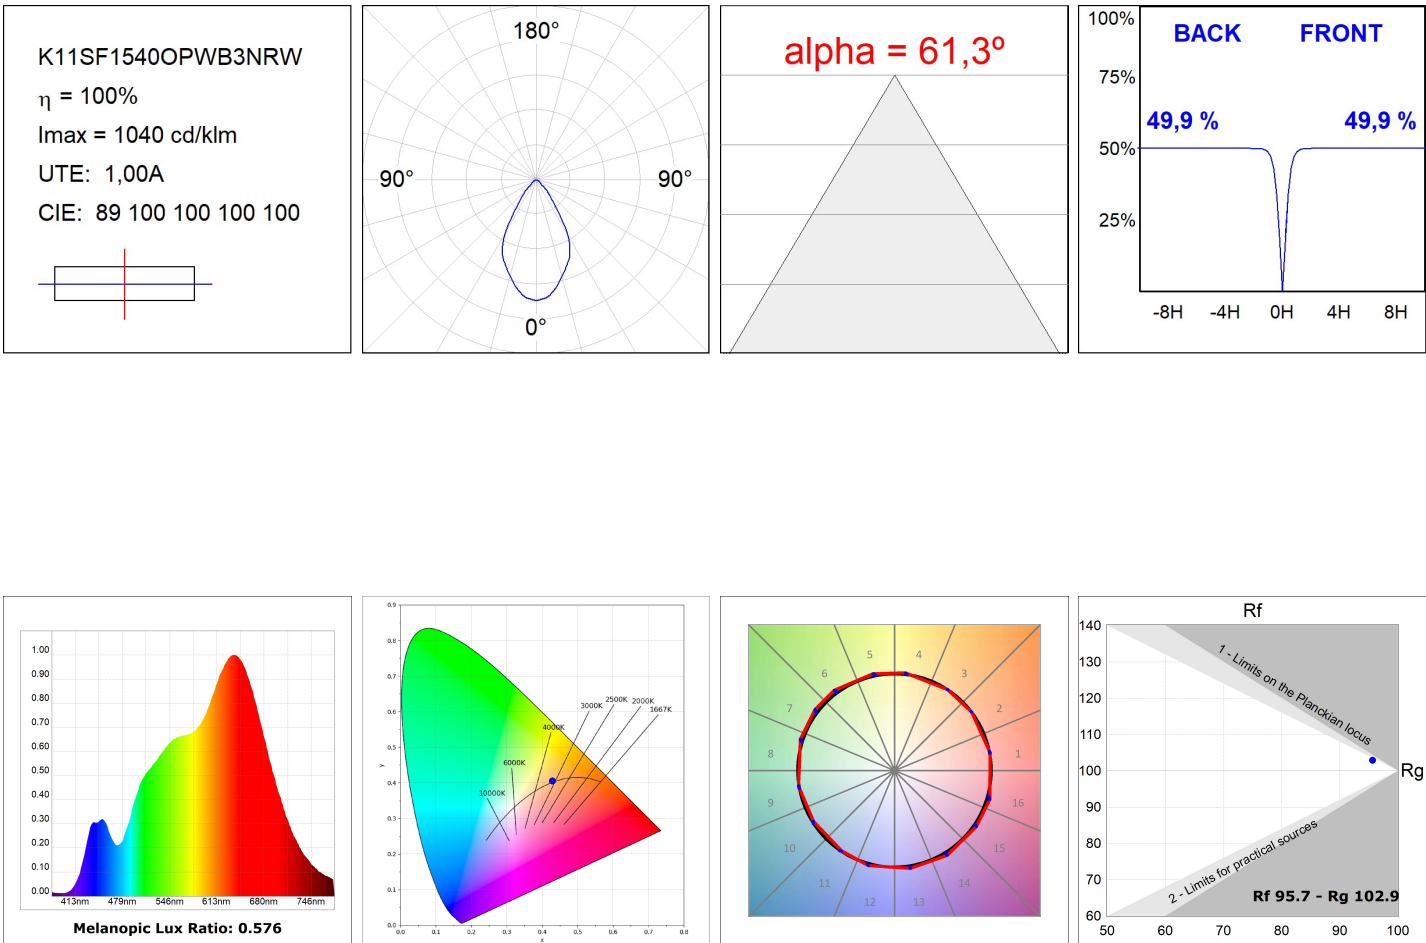

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH