KOMBIC 100 SURFACE

LAMP
Worktitude for light

K11SF1540WF927DWW **-** **KOMBIC 100 SF 1500 IP43 9VWW WFL DA W/W**

Description:

Finish: Matte white RAL 9010

TECHNICAL SPECIFICATIONS:

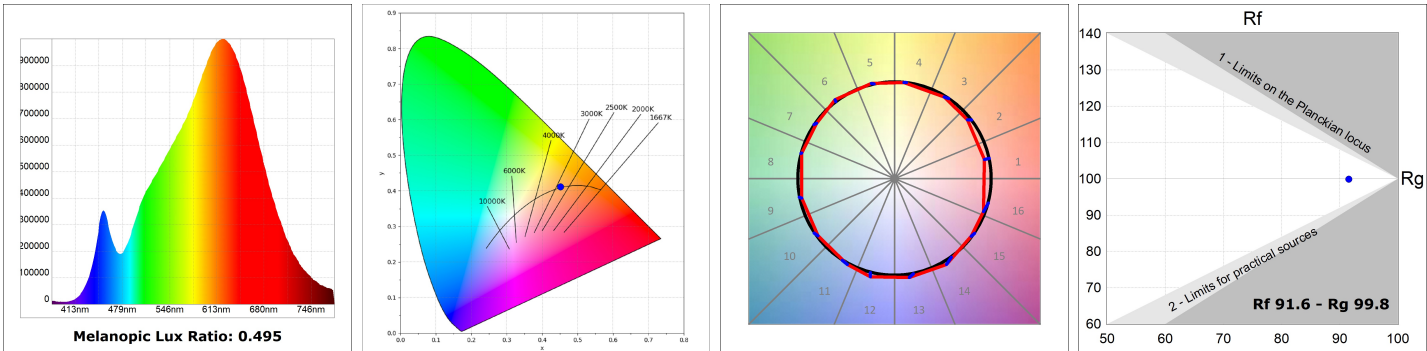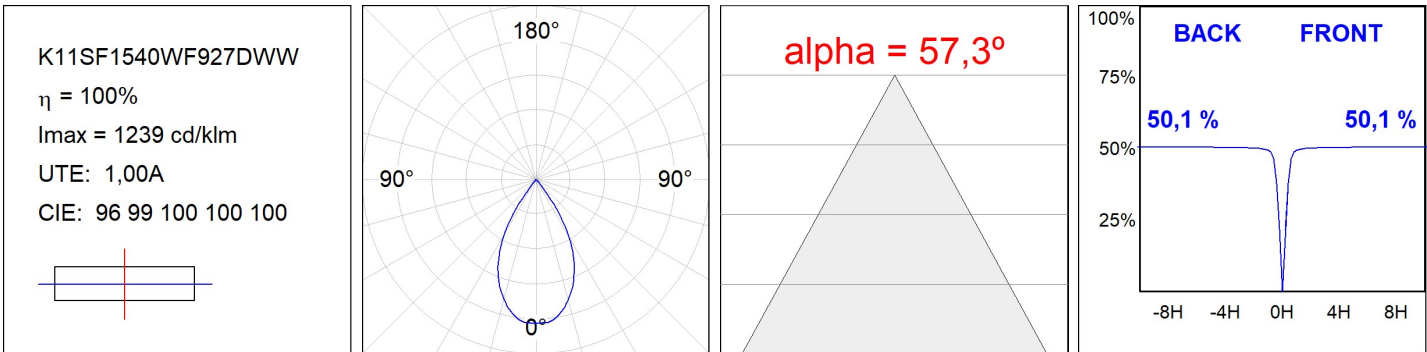|				
Light output:	1.044 lm		**ºK :**	2700
Plum:	10W		**CRI :**	90
Efficacy:	104,4 lm/w		**R9 :**	57
UGR:	<19			
LED Lifetime:	>100.000h L90 B10 (Ta=25ºC)			
Power:	8,5W			

Light output tolerance +/- 10%

IP 43

EPD

CUSTOM MADE OPTIONS:

1-10V | | | Bluetooth | ↑lm | LED RETAIL | | RAW | PUSH | TRIAC | K

K11SF1540WF927DWW   KOMBIC 100 SF 1500 IP43 9VWW WFL DA W/W

PHOTOMETRIC DATA :

K11SF1540WF927DWW

η = 100%

Imax = 1239 cd/klm

UTE: 1,00A

CIE: 96 99 100 100 100

alpha = 57,3º

BACK   FRONT

50,1 %   50,1 %

Melanopic Lux Ratio: 0.495

Rf

1 - Limits on the Planckian locus

2 - Limits for practical sources

Rf 91.6 - Rg 99.8

Rg

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

03-06-2025

Pág.   2 / 3

Data according to regulations 2019/2020/EU and 2019/2015/EU

LAMP
Worktitude for light

ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

03-06-2025

Pág.   3 / 3