


## KOMBIC 100 SURFACE

K11SF1540WF940NBB



## KOMBIC 100 SF 1500 IP43 9NW WFL BK/BK

## Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011


Weight: 502 g

Installation: Surface

## TECHNICAL SPECIFICATIONS:

Light output:	1.085 lm	°K :	4000
Plum:	13,7W	CRI :	90
Efficacy:	79,2 lm/w	R9 :	52
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	12W		

Light output tolerance +/- 10%

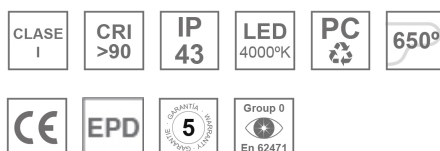

## CUSTOM MADE OPTIONS:




KOMBIC 100 SURFACE

K11SF1540WF940NBB

KOMBIC 100 SF 1500 IP43 9NW WFL BK/BK

PHOTOMETRIC DATA :

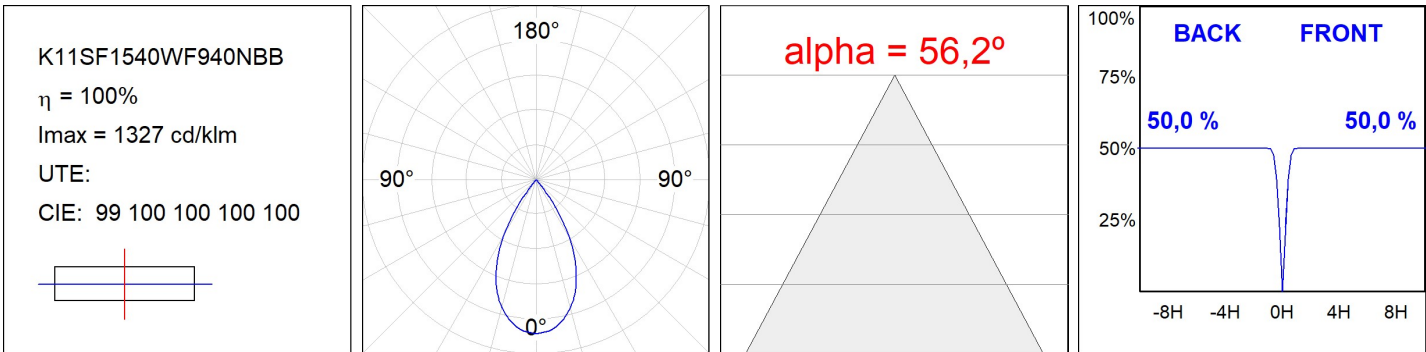

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:  
K11SUADLATBK

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:  
K11SUADLATWH

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH