

## KOMBIC 100 SURFACE

K11SF1540WF940NBW

## - KOMBIC 100 SF 1500 IP43 9NW WFL BK/WH

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011

**TECHNICAL SPECIFICATIONS:**



<b>Light output:</b>	1.089 lm	<b>°K :</b>	4000
<b>Plum:</b>	10W	<b>CRI :</b>	90
<b>Efficacy:</b>	108,9 lm/w	<b>R9 :</b>	59
<b>UGR:</b>	<19		
<b>LED Lifetime:</b>	>100.000h L90 B10 (Ta=25°C)		
<b>Power:</b>	8,5W		

*Light output tolerance +/- 10%*

**CUSTOM MADE OPTIONS:**

K11SF1540WF940NBW KOMBIC 100 SF 1500 IP43 9NW WFL BK/WH

PHOTOMETRIC DATA :

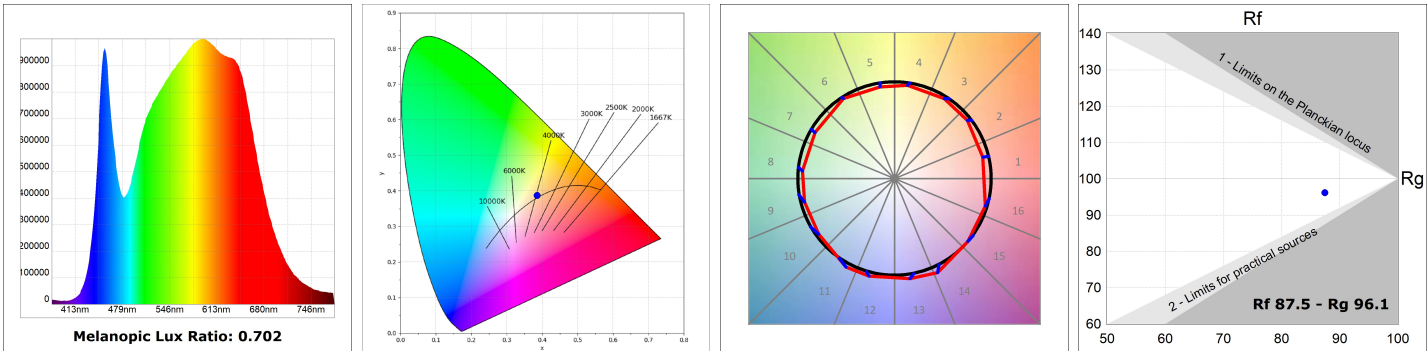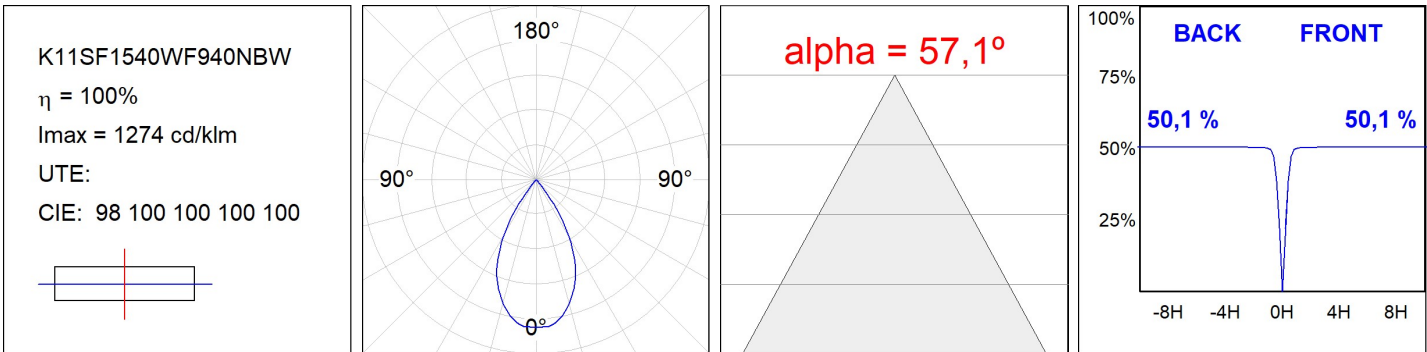

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:  
K11SUADLATBK

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:  
K11SUADLATWH

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH