

KOMBIC 100 SURFACE


K11SF1540WFWB3NWW



KOMBIC 100 SF 1200 IP43 WBW WFL WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 502 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	857 lm	°K :	3000
Plum:	13,9W	CRI :	95
Efficacy:	61,6 lm/w	R9 :	99
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	11,8W		


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF1540WFWB3NWW

KOMBIC 100 SF 1200 IP43 WBW WFL WH/WH

PHOTOMETRIC DATA :

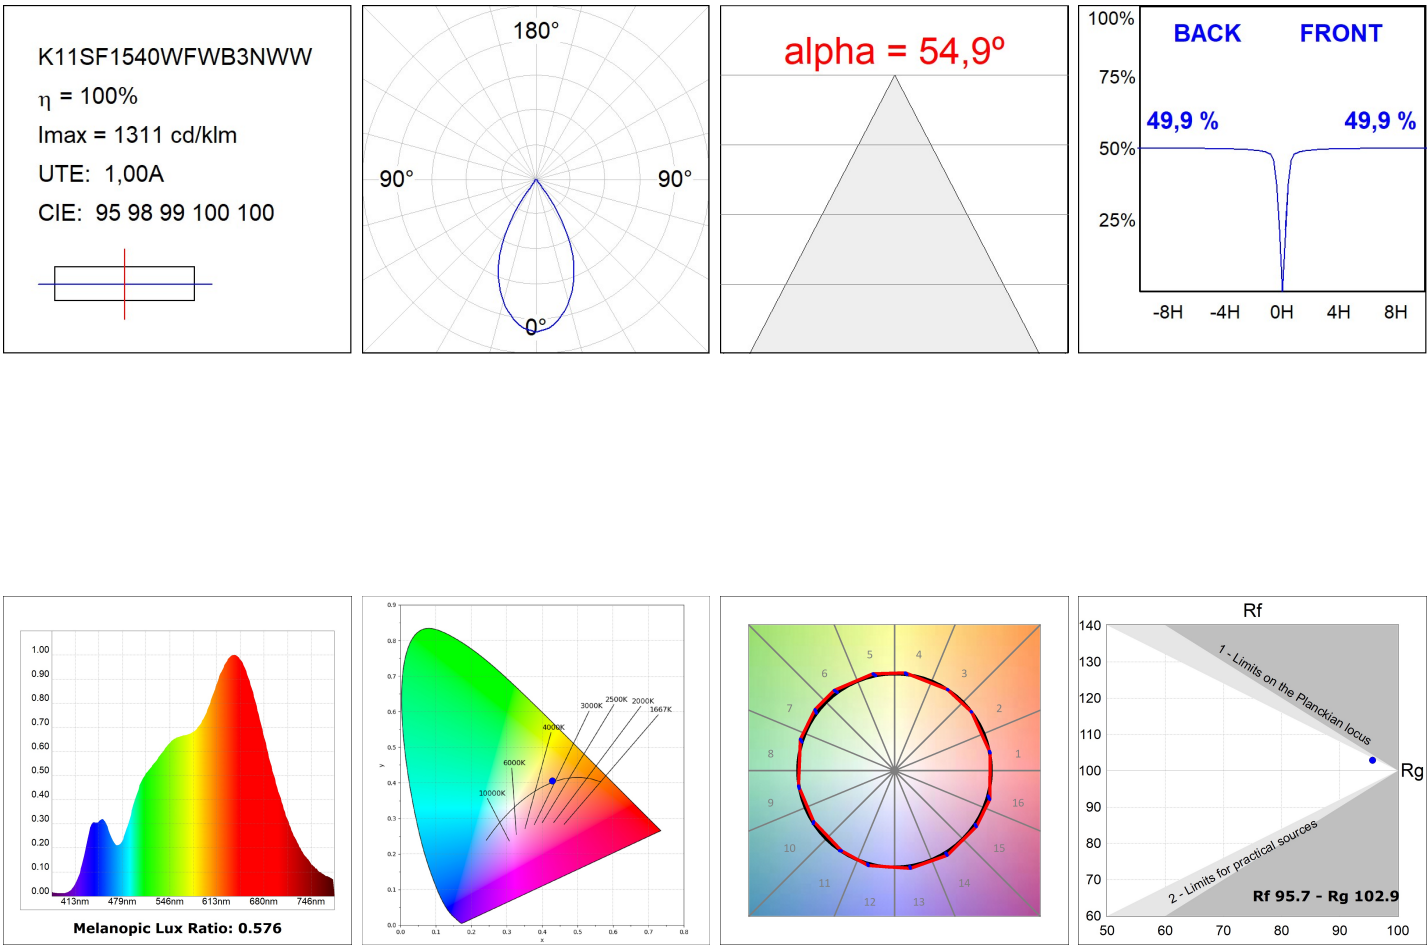

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH