KOMBIC 100 SURFACE

LAMP
Worktitude for light

K11SF1540WFWB4NWW — **KOMBIC 100 SF 1200 IP43 WBN WFL WH/WH**

Description:

Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010
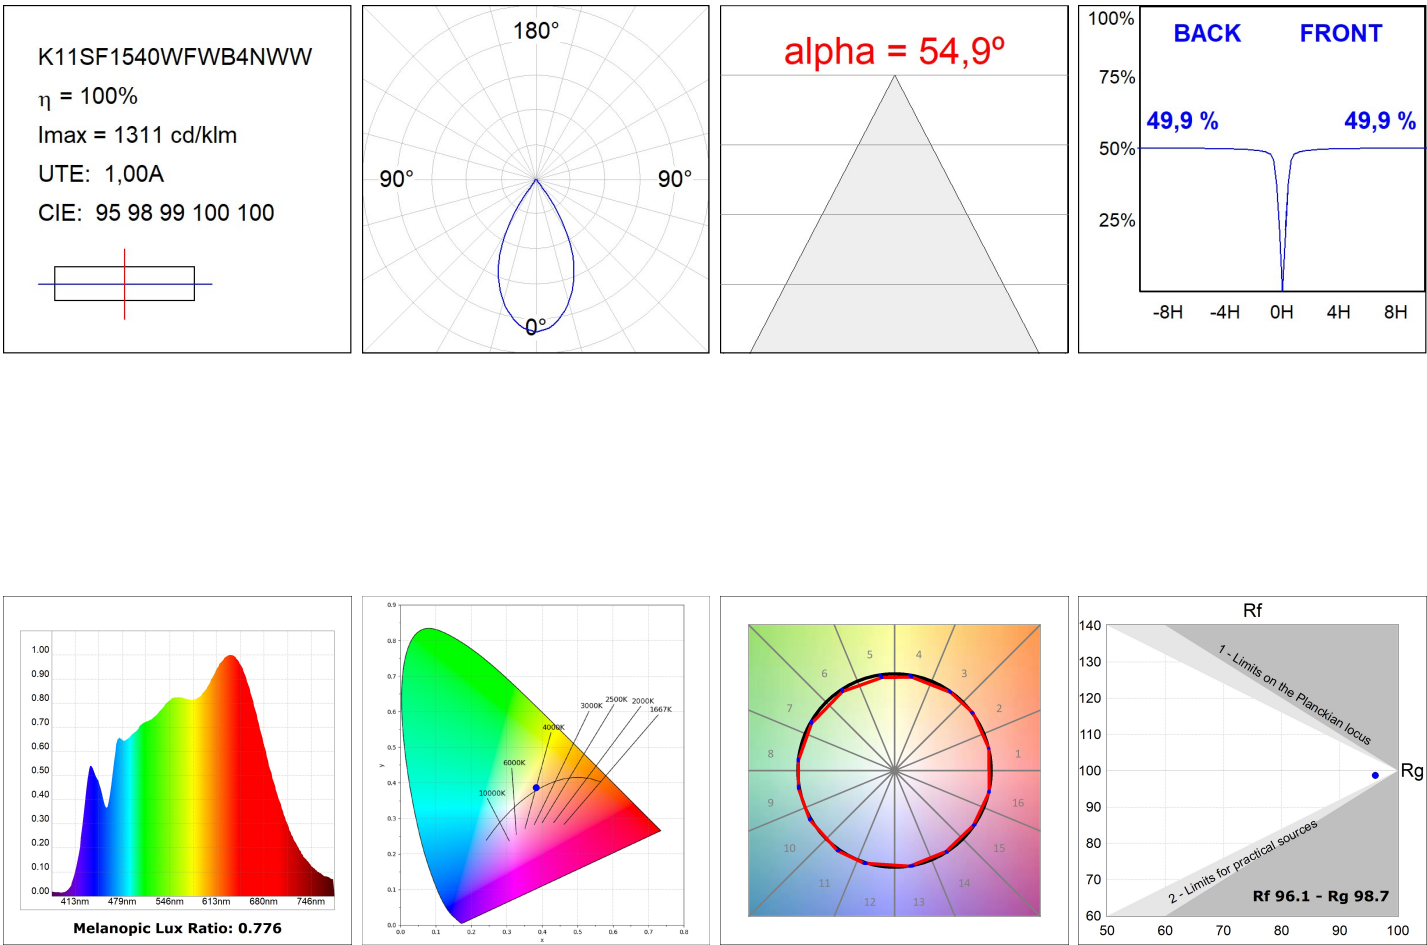
TECHNICAL SPECIFICATIONS:

R9 : 91

IP 43

EPD

CUSTOM MADE OPTIONS:

1-10V | | | Bluetooth | ↑lm | | PUSH | TRIAC

LAMP
Worktitude for light

K11SF1540WFWB4NWW   KOMBIC 100 SF 1200 IP43 WBN WFL WH/WH

PHOTOMETRIC DATA :

K11SF1540WFWB4NWW

η = 100%

Imax = 1311 cd/klm

UTE: 1,00A

CIE: 95 98 99 100 100

alpha = 54,9º

BACK   FRONT

49,9 %   49,9 %

Melanopic Lux Ratio: 0.776

Rf

1 - Limits on the Planckian locus

Rg

2 - Limits for practical sources

Rf 96.1 – Rg 98.7

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

LAMP
Worktitude for light

ACCESORIES :

Suspension

Product code:	**Description:**
K11SUADLATBK	KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:	**Description:**
K11SUADLATWH	KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

12-03-2025

Pág.   3 / 3