

KOMBIC 100 SURFACE

K11SF2023RF840DBB

- KOMBIC 100 SF 2000 IP23 NW RF FL DA B/B

Description:

Finish: Matte black RAL 9011

Weight: 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.226 lm	°K :	4000
Plum:	13,9W	CRI :	80
Efficacy:	114,3 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%




KOMBIC 100 SURFACE

K11SF2023RF840DBB

KOMBIC 100 SF 2000 IP23 NW RF FL DA B/B

PHOTOMETRIC DATA :

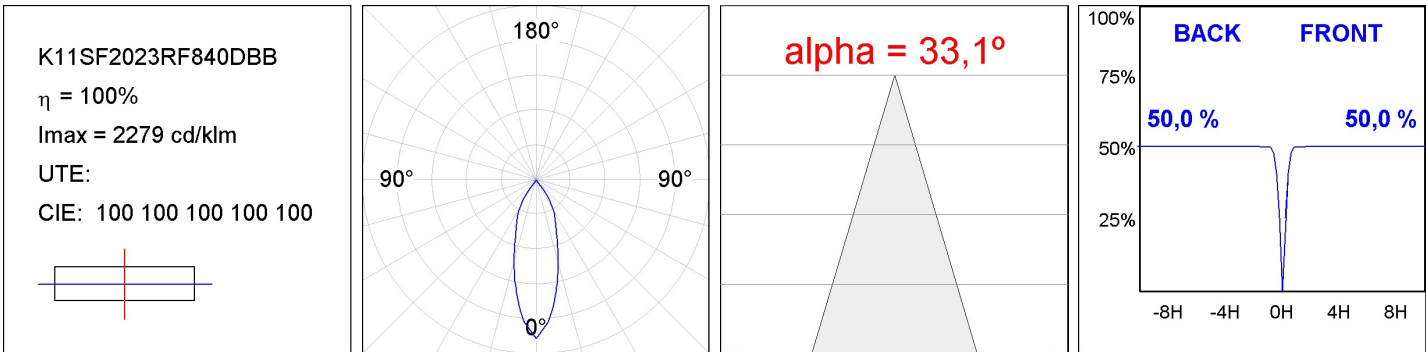

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH