KOMBIC 100 SURFACE

K11SF2023RF840NBW

KOMBIC 100 SF 2000 IP23 NW RF FL BK/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: Matte black RAL 9011

Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.226 lm	⁰К:	4000
Plum:	14,1W	CRI :	80
Efficacy:	86,9 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


KOMBIC 100 SURFACE

K11SF2023RF840NBW

KOMBIC 100 SF 2000 IP23 NW RF FL BK/WH



PHOTOMETRIC DATA :

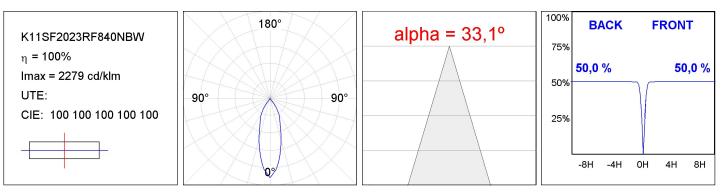

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light