

K11SF2023RF840NMW

- KOMBIC 100 SF 2000 IP23 NW RF FL MA/WH

Description:**Finish:** metalized polycarbonate mate**Weight:** 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.692 lm	°K :	4000
Plum:	14,1W	CRI :	80
Efficacy:	86,9 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%




CUSTOM MADE OPTIONS:

KOMBIC 100 SURFACE

K11SF2023RF840NMW

KOMBIC 100 SF 2000 IP23 NW RF FL MA/WH

PHOTOMETRIC DATA :

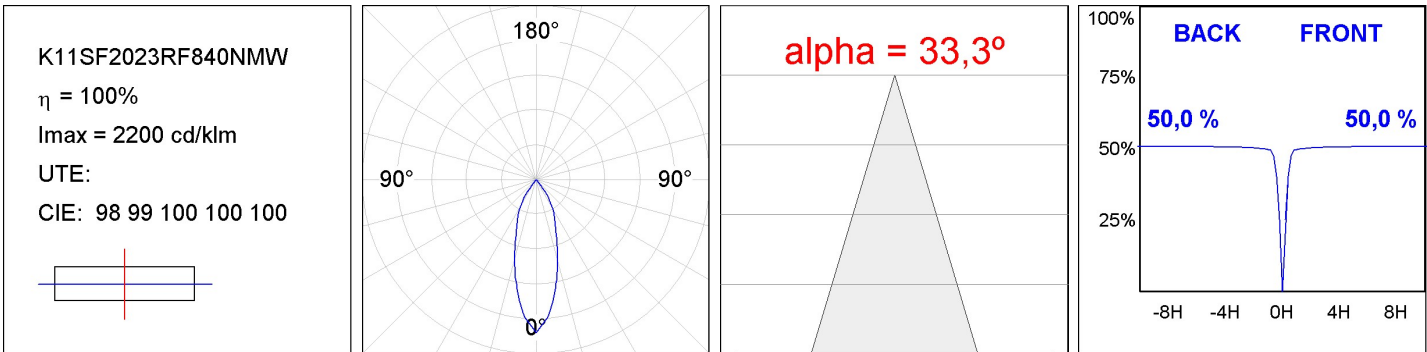

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH