KOMBIC 100 SURFACE

K11SF2023RF930DWB

- KOMBIC 100 SF 2000 IP23 9WW RF FL DA W/B

Description:

Finish: Matte white RAL 9010 Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| Light output: | 1.893 lm | ⁰К: | 3000 |
|---------------|--------------------------|---------------|------------------|
| Plum: | 20W | CRI : | 90 |
| Efficacy: | 94,6 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Туре: | СОВ | Gear: | Adjustable DALI |
| LED Lifetime: | 50.000 L70 B10 (Ta=25⁰C) | | |
| Power: | 13W | | |

Light output tolerance +/- 10%

EPD

Worktitude for light


KOMBIC 100 SURFACE


K11SF2023RF930DWB

KOMBIC 100 SF 2000 IP23 9WW RF FL DA W/B



PHOTOMETRIC DATA :

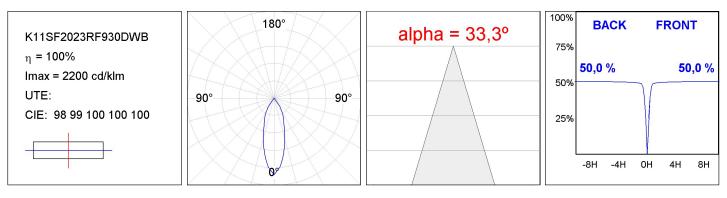

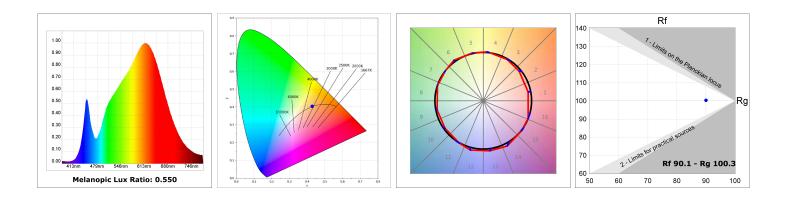

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light