Product datasheet

KOMBIC 100 SURFACE

LAMP
Worktitude for light

K11SF2023RF930NBB — **KOMBIC 100 SF 2000 IP23 9WW RF FL BK/BK**

Description:

Finish: Matte black RAL 9011

Weight: 502 g
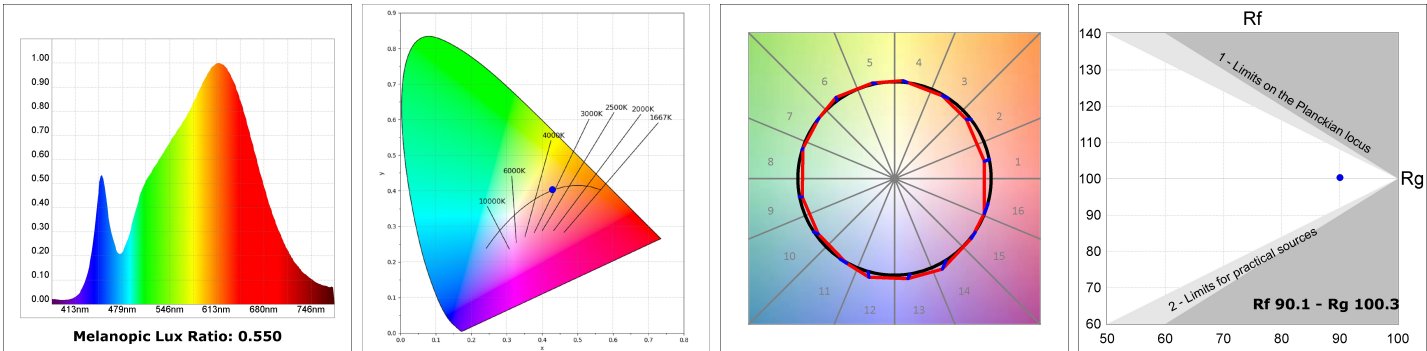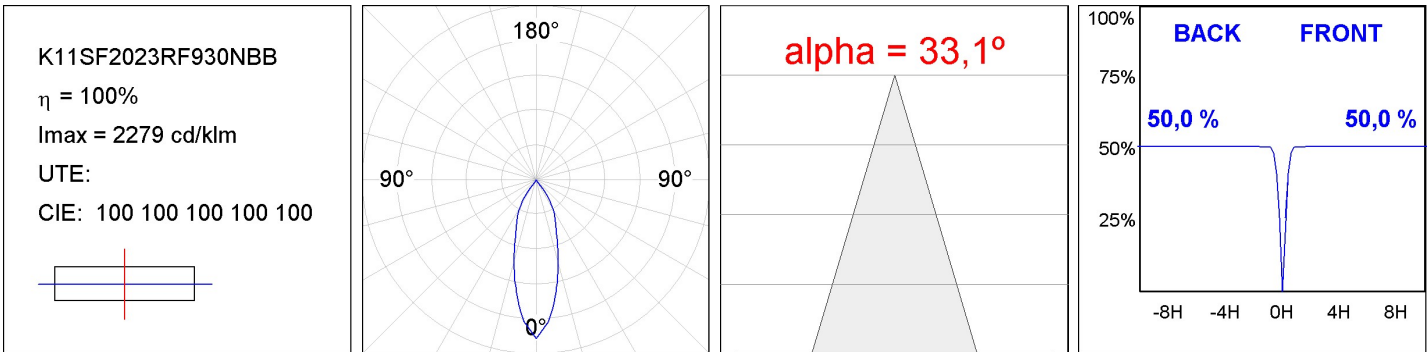
Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.785 lm	**ºK :**	3000
Plum:	21,6W	**CRI :**	90
Efficacy:	94,6 lm/w	**MacAdam:**	3
UGR:	<19	**Power Supply:**	220-240V 50/60Hz
Type:	COB	**Gear:**	Electronic
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)		
Power:	13W		

Light output tolerance +/- 10%

EPD

12-03-2025

K11SF2023RF930NBB   KOMBIC 100 SF 2000 IP23 9WW RF FL BK/BK

PHOTOMETRIC DATA :

K11SF2023RF930NBB

η = 100%

Imax = 2279 cd/klm

UTE:

CIE: 100 100 100 100 100

alpha = 33,1º

BACK   FRONT

50,0 %   50,0 %

Melanopic Lux Ratio: 0.550

Rf 90.1 – Rg 100.3

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

12-03-2025

Pág.   2 / 3

ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

12-03-2025

Pág.   3 / 3