KOMBIC 100 SURFACE

K11SF2023RF930NMB

- KOMBIC 100 SF 2000 IP23 9WW RF FL MA/BK

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.893 lm	°K :	3000
Plum:	21,6W	CRI :	90
Efficacy:	82,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Туре:	СОВ	Gear:	Electronic
LED Lifetime:	50.000 L70 B10 (Ta=25⁰C)		
Power:	13W		

Light output tolerance +/- 10%

EPD



KOMBIC 100 SURFACE


K11SF2023RF930NMB


KOMBIC 100 SF 2000 IP23 9WW RF FL MA/BK





PHOTOMETRIC DATA :

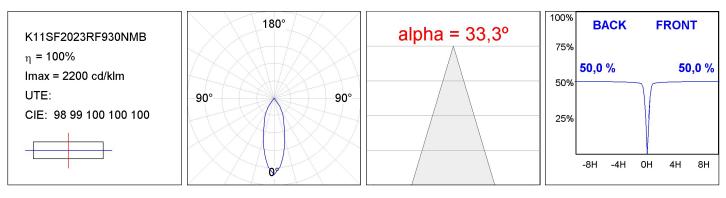

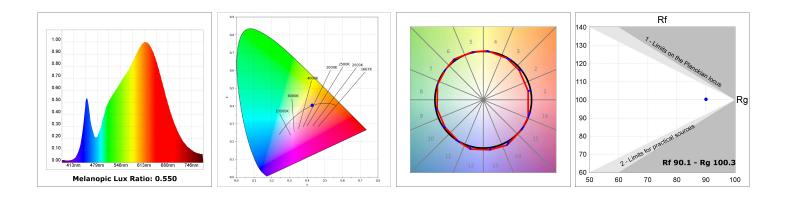

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light