## **KOMBIC 100 SURFACE**

K11SF2023RF940DWB

- KOMBIC 100 SF 2000 IP23 9NW RF FL DA W/B

Description:

Finish: Matte white RAL 9010 Weight: 712 g

Installation: Recessed

#### **TECHNICAL SPECIFICATIONS:**

Light output:	2.019 lm	⁰K :	4000
Plum:	20W	CRI :	90
Efficacy:	100,9 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%

EPD




## **KOMBIC 100 SURFACE**


K11SF2023RF940DWB

KOMBIC 100 SF 2000 IP23 9NW RF FL DA W/B



#### **PHOTOMETRIC DATA :**

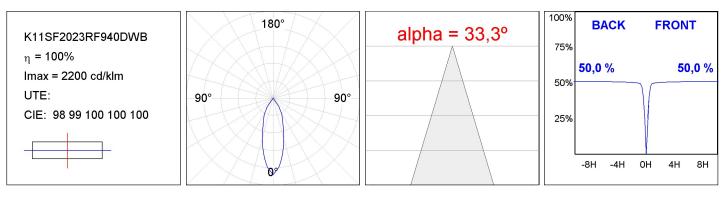

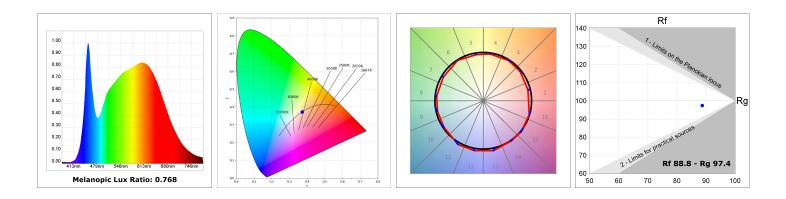

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

#### Product datasheet

# **KOMBIC 100 SURFACE**

### ACCESORIES :

### Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light