

KOMBIC 100 SURFACE

K11SF2023RW830DBB

- KOMBIC 100 SF 2000 IP23 WW RF WFL DA B/B

**Description:****Finish:** Matte black RAL 9011**Weight:** 712 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.421 lm | °K : | 3000 |
| Plum: | 13,9W | CRI : | 80 |
| Efficacy: | 102,2 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Type: | COB | Gear: | Adjustable DALI |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | | |
| Power: | 13W | | |


Light output tolerance +/- 10%

KOMBIC 100 SURFACE

K11SF2023RW830DBB

KOMBIC 100 SF 2000 IP23 WW RF WFL DA B/B

PHOTOMETRIC DATA :

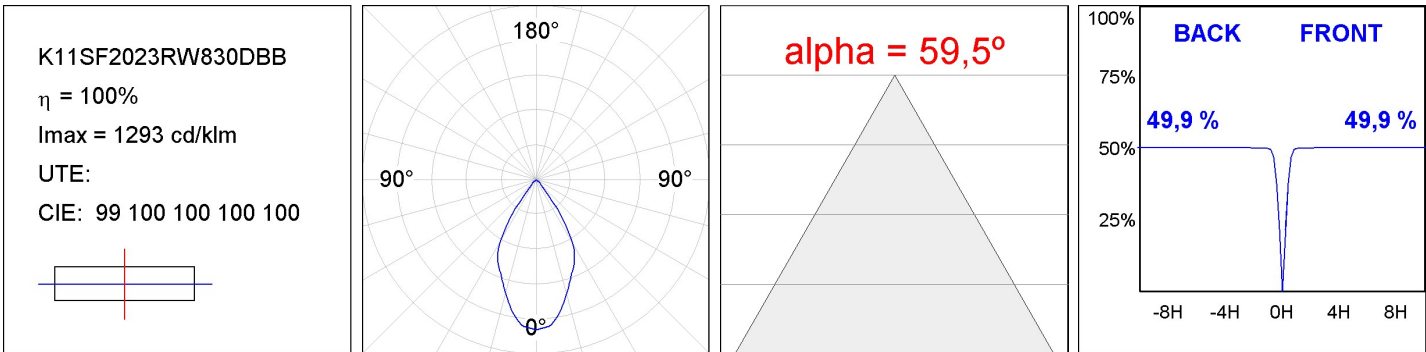

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH