## **KOMBIC 100 SURFACE**

K11SF2023RW927NMW

- KOMBIC 100 SF 2000 IP23 9VWW RF WFL M/W

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Surface

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.710 lm	⁰K :	2700
Plum:	21,6W	CRI :	90
Efficacy:	79,1 lm/w	R9 :	58
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Electronic

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


## **KOMBIC 100 SURFACE**


K11SF2023RW927NMW

KOMBIC 100 SF 2000 IP23 9VWW RF WFL M/W



#### **PHOTOMETRIC DATA :**

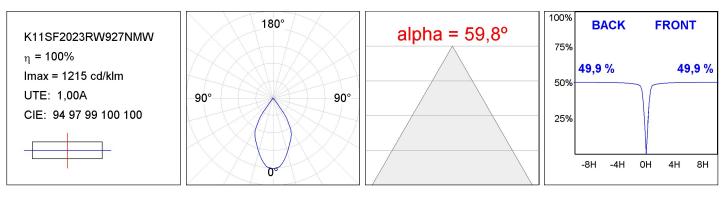

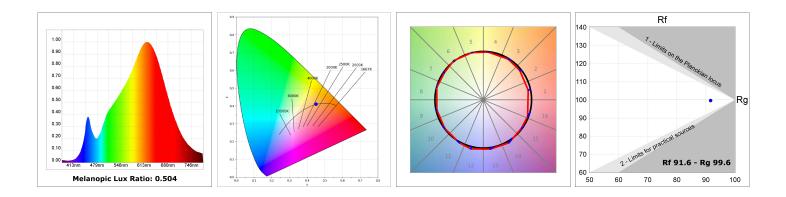

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

#### Product datasheet

# **KOMBIC 100 SURFACE**

### ACCESORIES :

### Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light