KOMBIC 100 SURFACE

K11SF2023RW930NMB

- KOMBIC 100 SF 2000 IP23 9WW RF WFL MA/BK

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.784 lm	⁰К:	3000
Plum:	21,6W	CRI :	90
Efficacy:	82,5 lm/w	R9 :	53
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Electronic

Light output tolerance +/- 10%

EPD

Worktitude for light


KOMBIC 100 SURFACE


K11SF2023RW930NMB

KOMBIC 100 SF 2000 IP23 9WW RF WFL MA/BK



PHOTOMETRIC DATA :

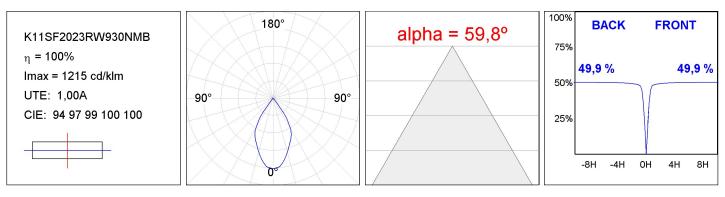

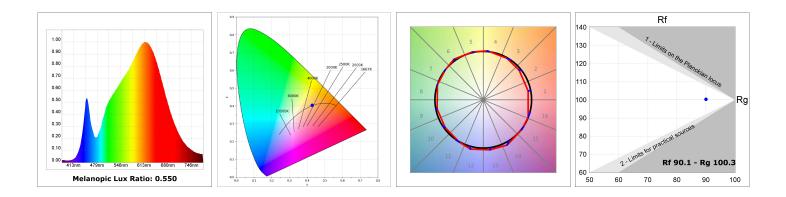

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light