## **KOMBIC 100 SURFACE**

K11SF2023RW940DMW

### - KOM 100 SF 2000 IP23 9NW RF WFL DA MA/WH

**Description:** 

Finish: Matte Traffic white RAL 9016 Weight: 712 g

Installation: Recessed

#### **TECHNICAL SPECIFICATIONS:**

Light output:	1.902 lm	⁰К:	4000
Plum:	20W	CRI :	90
Efficacy:	95,1 lm/w	R9 :	65
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

EPD

Worktitude for light


# **KOMBIC 100 SURFACE**


K11SF2023RW940DMW

KOM 100 SF 2000 IP23 9NW RF WFL DA MA/WH



#### **PHOTOMETRIC DATA :**

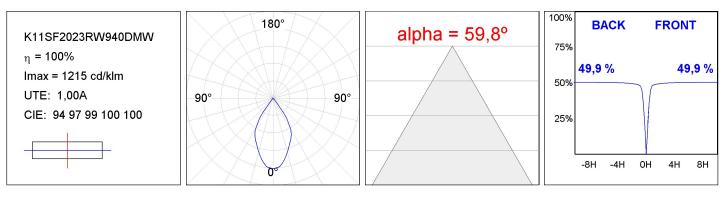

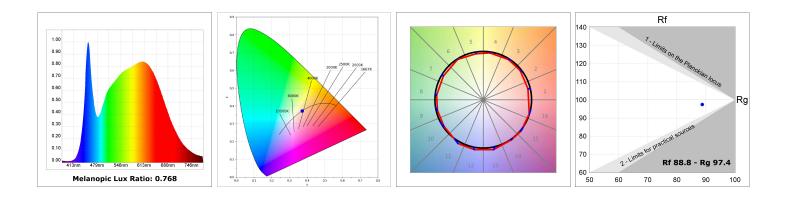

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

#### Product datasheet

# **KOMBIC 100 SURFACE**

## ACCESORIES :

### Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light