

KOMBIC 100 SURFACE


K11SF2040OP930NRB




KOMBIC 100 SF 2000 IP43 9WW OP BR/BK

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF 2000 IP40 9WW OP BR/BK. LAMP brand. Body made of black aluminum extrusion with gloss polycarbonate reflector and optical film. Injected aluminum heat sink. Model for COB LED, with 3000K temperature, CRI 90 and control gear included. IP43 protection rating. Photobiological safety group 0. Insulation class I. Lifetime: 50.000 L70 B10 Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE**Weight:** 676 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.649 lm	°K :	3000
Plum:	20,4W	CRI :	90
Efficacy:	80,8 lm/w	R9 :	67
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	17W	Gear:	Electronic


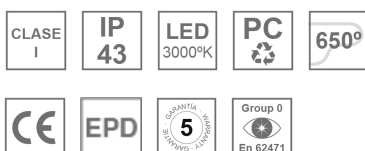
Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF20400P930NRB

KOMBIC 100 SF 2000 IP43 9WW OP BR/BK

PHOTOMETRIC DATA :

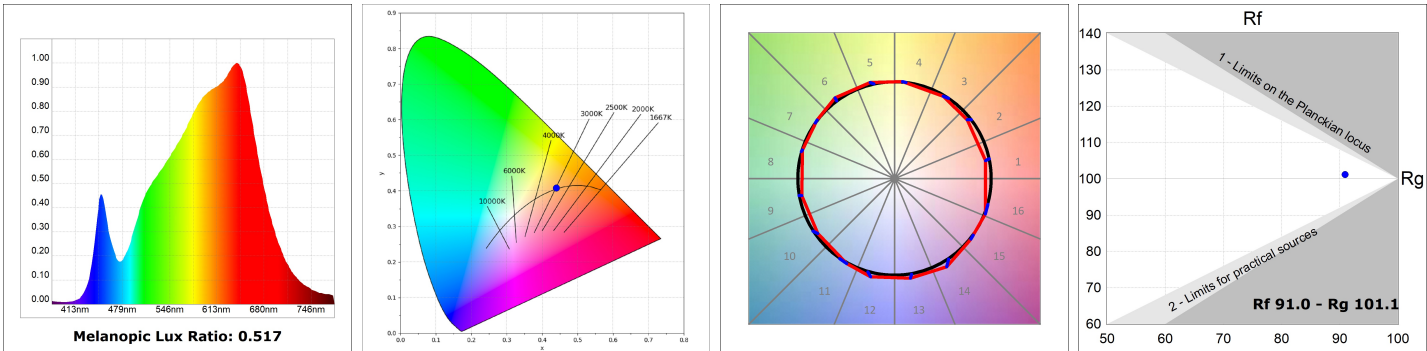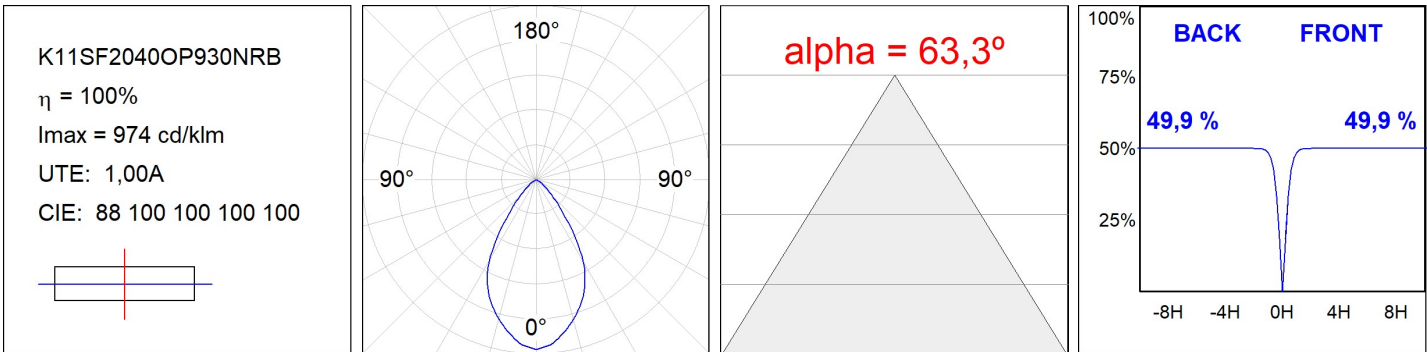

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH