**LAMP**
Worktitude for light

K11SF2040OPWB4NWW — **KOMBIC 100 SF 1800 IP43 WBN OP WH/WH**

Description:

Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

120
ø100mm

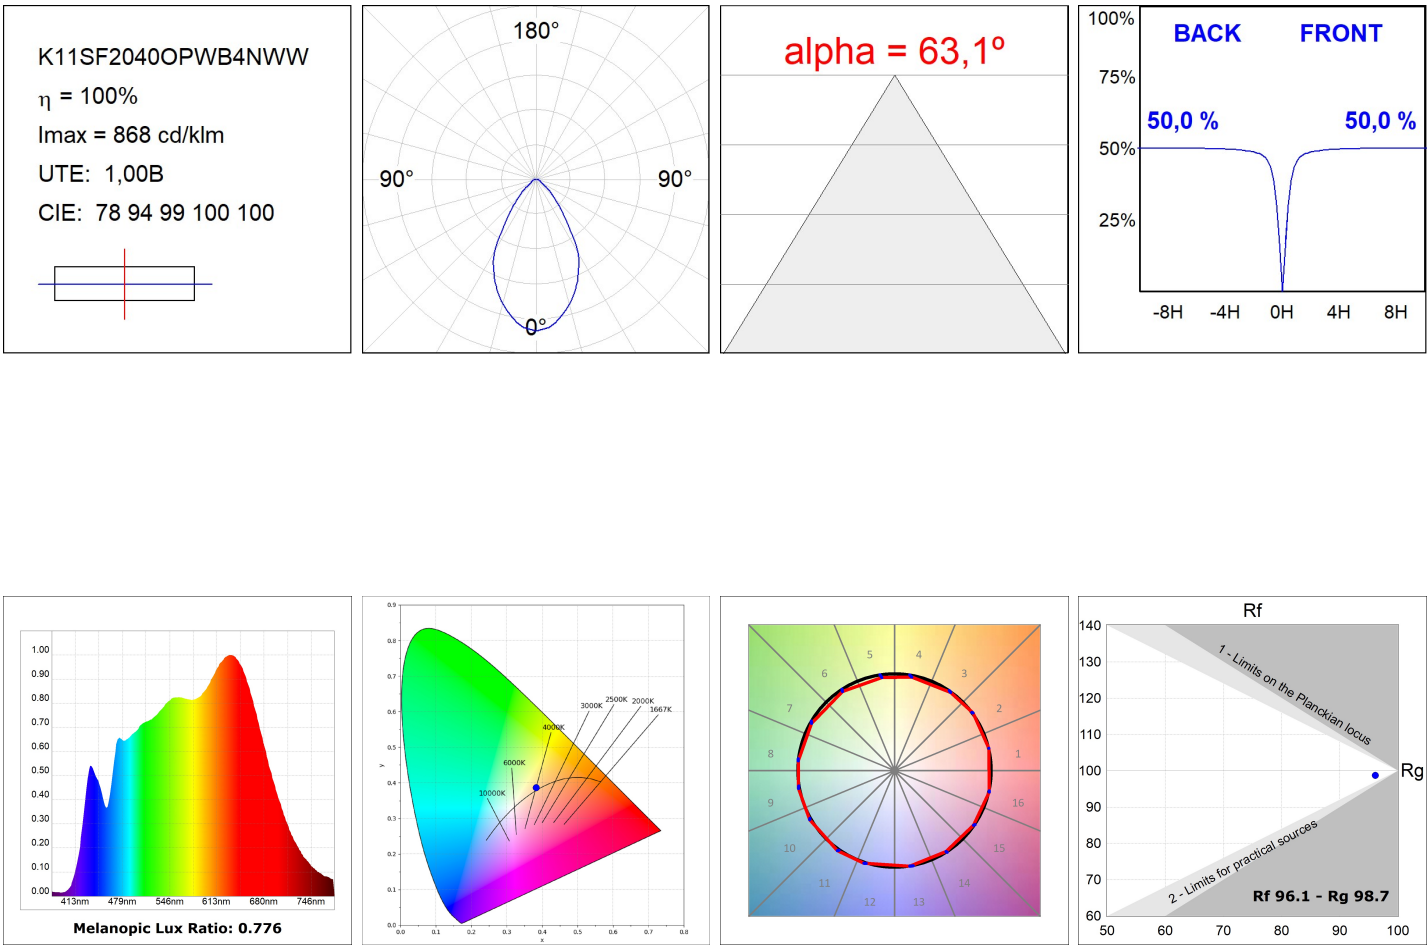**Finish:** Matte white RAL 9010

TECHNICAL SPECIFICATIONS:

R9 : 83

IP
43

EPD

CUSTOM MADE OPTIONS:

1-10V   PUSH   TRIAC   ↑lm

LAMP
Worktitude for light

K11SF2040OPWB4NWW   KOMBIC 100 SF 1800 IP43 WBN OP WH/WH

PHOTOMETRIC DATA :

K11SF2040OPWB4NWW

η = 100%

Imax = 868 cd/klm

UTE: 1,00B

CIE: 78 94 99 100 100

alpha = 63,1º

BACK   FRONT

50,0 %   50,0 %

Melanopic Lux Ratio: 0.776

Rf

Rg

1 - Limits on the Planckian locus

2 - Limits for practical sources

Rf 96.1 - Rg 98.7

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

12-03-2025

Pág.   3 / 3