

KOMBIC 100 SURFACE

K11SF2040WF927DMW

- KOMBIC 100 SF 2000 IP43 9VWW WFL DA M/W

Description:

Finish: metalized polycarbonate mate

TECHNICAL SPECIFICATIONS:

Light output:	1.384 lm	°K :	2700
Plum:	14W	CRI :	90
Efficacy:	98,9 lm/w	R9 :	57
UGR:	<19		
Type:	COB		
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	12,2W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:





KOMBIC 100 SURFACE

K11SF2040WF927DMW

KOMBIC 100 SF 2000 IP43 9VWW WFL DA M/W

PHOTOMETRIC DATA :

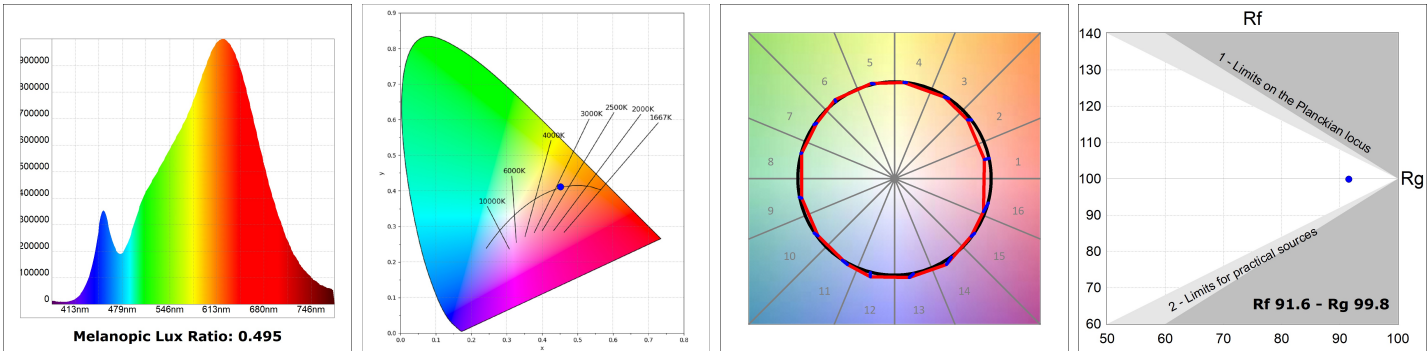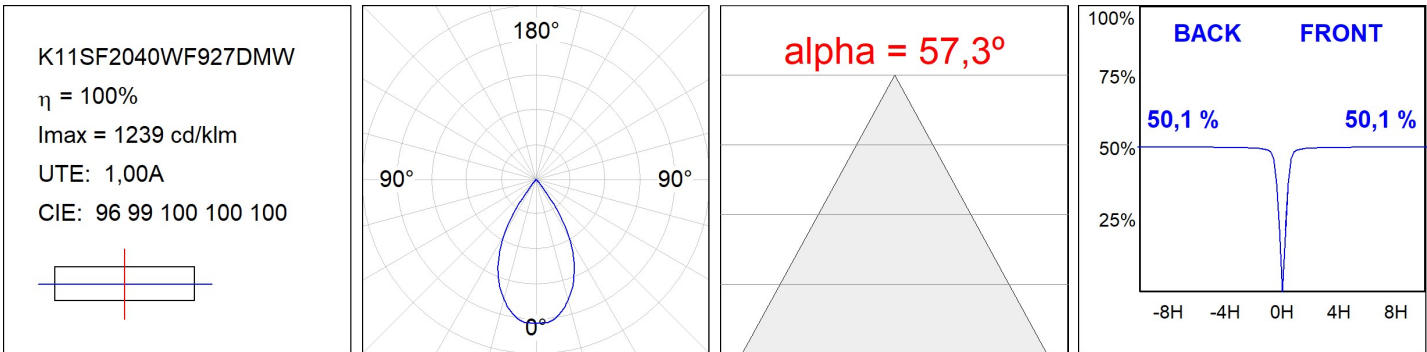

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH