


## KOMBIC 100 SURFACE

K11SF2040WF927NBB




## KOMBIC 100 SF 2000 IP43 9VWW WFL BK/BK

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 100 SF 2000, LAMP brand. Body made of black aluminum extrusion with black polycarbonate reflector. Injected aluminum heat sink. Model for COB LED, with 2700K temperature and CRI 90 and control gear included. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. IP43 protection rating. Insulation class I. Photobiological safety group 0. Lifetime: 50.000 L70 B10 Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.


**Finish:** Matte black RAL 9011**Weight:** 680 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.396 lm	<b>°K :</b>	2700
<b>Plum:</b>	20,3W	<b>CRI :</b>	90
<b>Efficacy:</b>	68,7 lm/w	<b>R9 :</b>	57
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	17W		

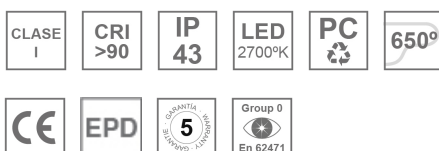**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

K11SF2040WF927NBB KOMBIC 100 SF 2000 IP43 9VWW WFL BK/BK

PHOTOMETRIC DATA :

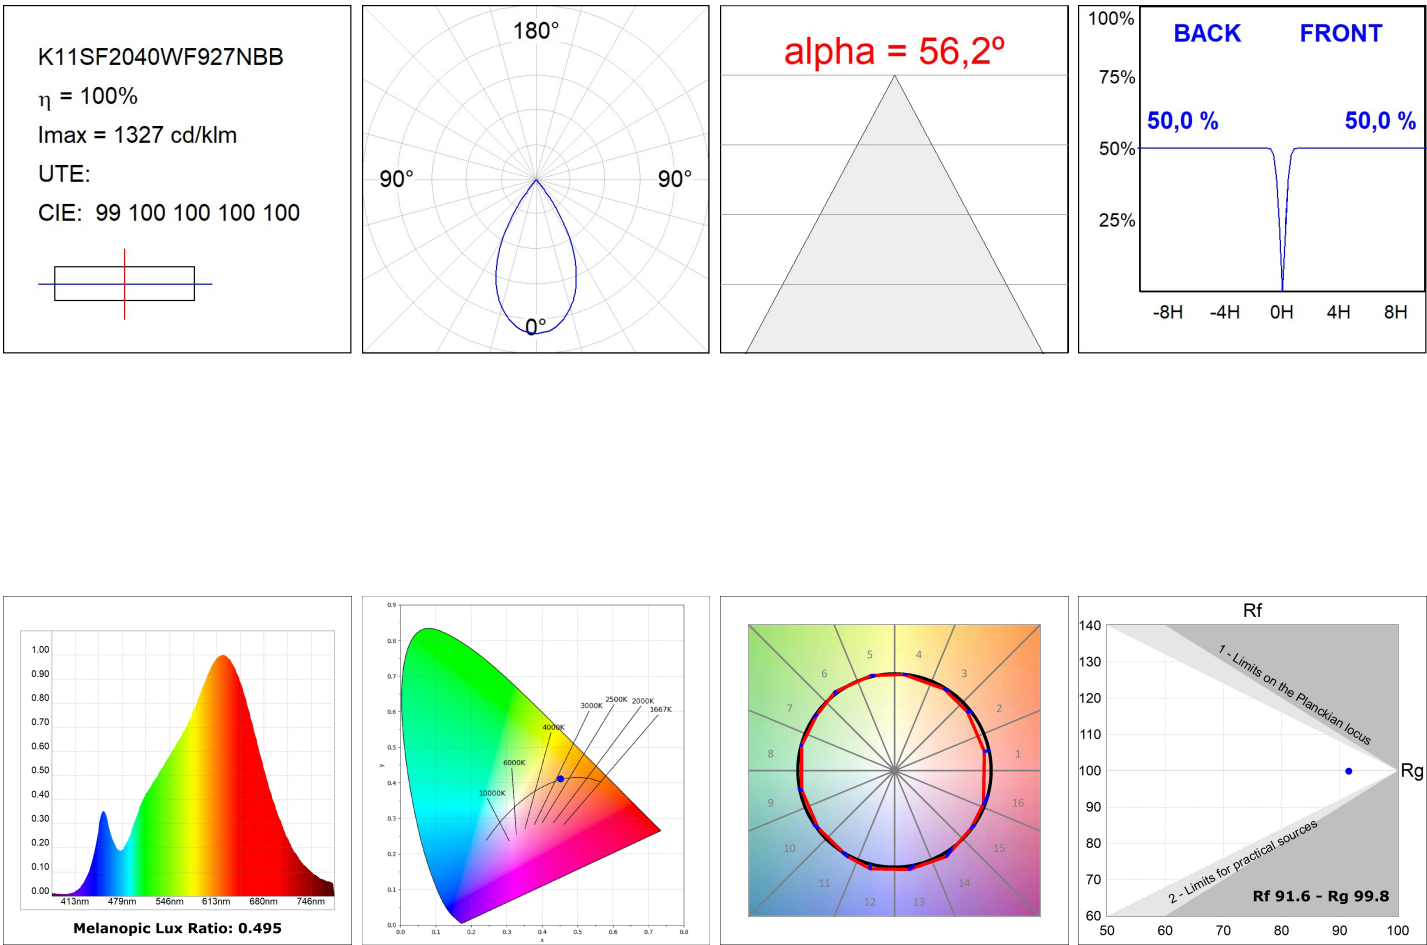

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:  
K11SUADLATBK

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:  
K11SUADLATWH

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH