

KOMBIC 100 SURFACE

K11SF2040WF930DMW

- KOMBIC 100 SF 2000 IP43 9WW WFL DA MA/WH

Description:

Finish: metalized polycarbonate mate

TECHNICAL SPECIFICATIONS:

Light output:	1.456 lm	°K :	3000
Plum:	14W	CRI :	90
Efficacy:	104 lm/w	R9 :	66
UGR:	<19		
Type:	COB		
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	12,2W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:





KOMBIC 100 SURFACE

K11SF2040WF930DMW

KOMBIC 100 SF 2000 IP43 9WW WFL DA MA/WH

PHOTOMETRIC DATA :

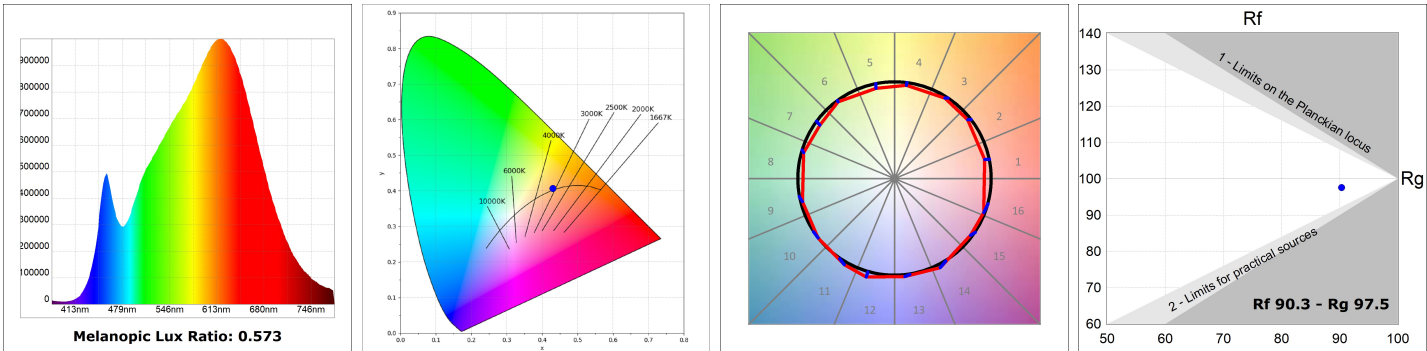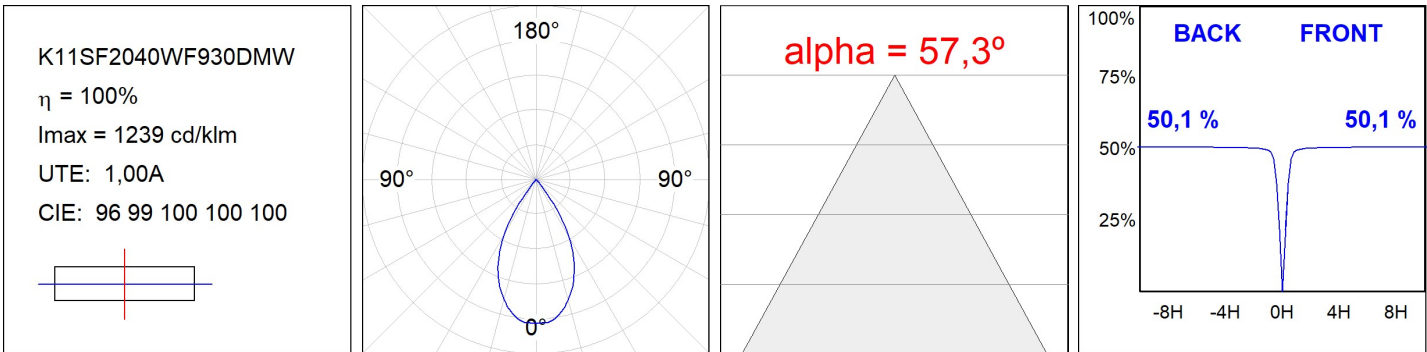

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH