

KOMBIC 100 SURFACE


K11SF2040WF930NBB




KOMBIC 100 SF 2000 IP43 9WW WFL BK/BK

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF 2000 IP43 9WW WFL BK/BK. LAMP brand. Body made of black aluminum extrusion with black polycarbonate reflector. Injected aluminum heat sink. Model for COB LED, with Warm White temperature and control gear included. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. IP43 protection rating. Insulation class I. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: Matte black RAL 9011**Weight:** 712 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.410 lm	°K :	3000
Plum:	14W	CRI :	90
Efficacy:	100,7 lm/w	R9 :	66
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	12,2W		

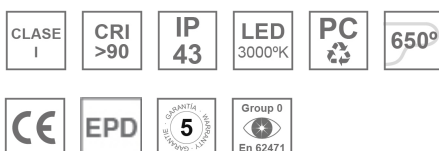Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

K11SF2040WF930NBB KOMBIC 100 SF 2000 IP43 9WW WFL BK/BK

PHOTOMETRIC DATA :

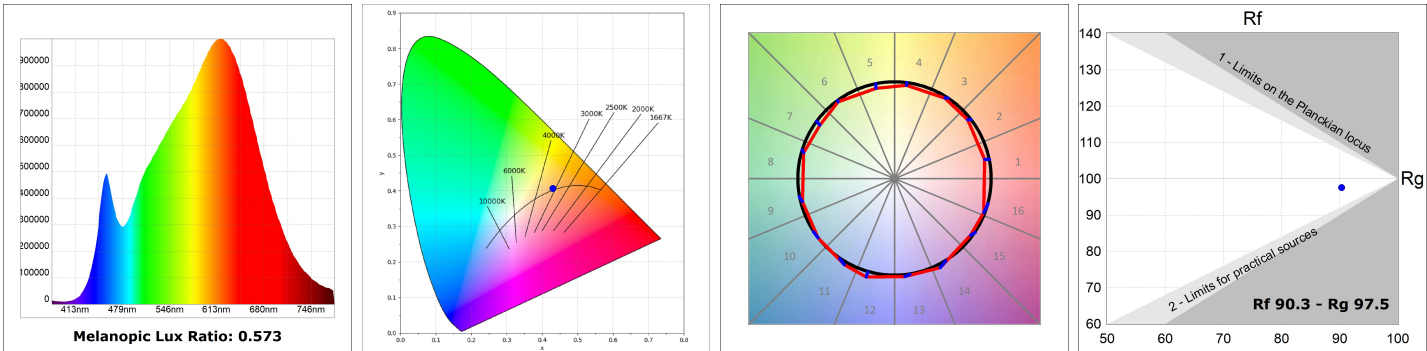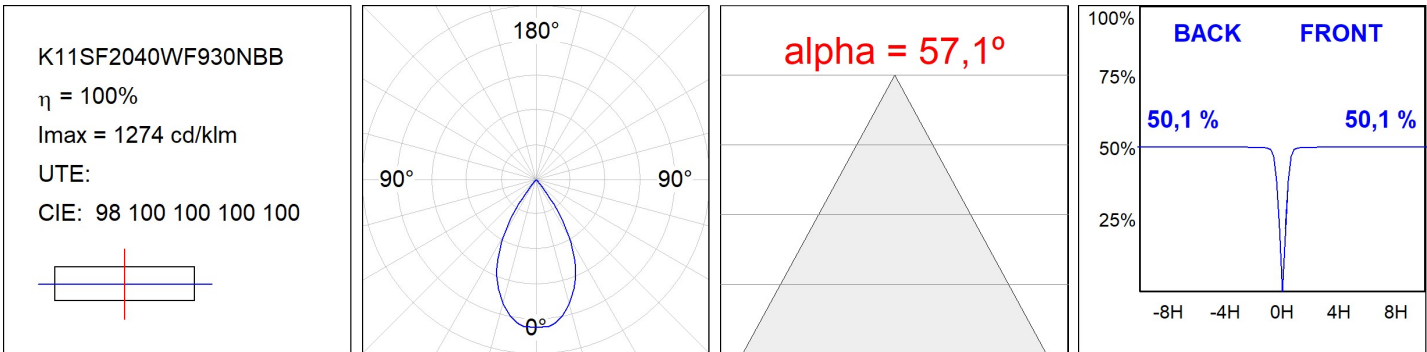

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH