

KOMBIC 100 SURFACE

K11SF2040WF940DMB - KOMBIC 100 SF 2000 IP43 9NW WFL DA MA/BK

Description:

Finish: metalized polycarbonate mate

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|-----------------------------|-------|------|
| Light output: | 1.504 lm | °K : | 4000 |
| Plum: | 14W | CRI : | 90 |
| Efficacy: | 107,4 lm/w | R9 : | 59 |
| UGR: | <19 | | |
| Type: | COB | | |
| LED Lifetime: | >100.000h L90 B10 (Ta=25°C) | | |
| Power: | 12,2W | | |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:





KOMBIC 100 SURFACE

K11SF2040WF940DMB

KOMBIC 100 SF 2000 IP43 9NW WFL DA MA/BK

PHOTOMETRIC DATA :

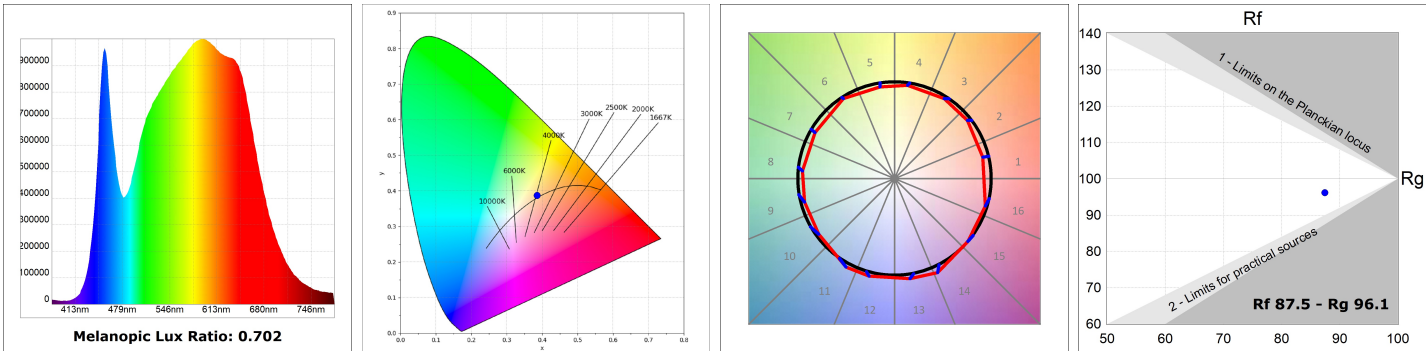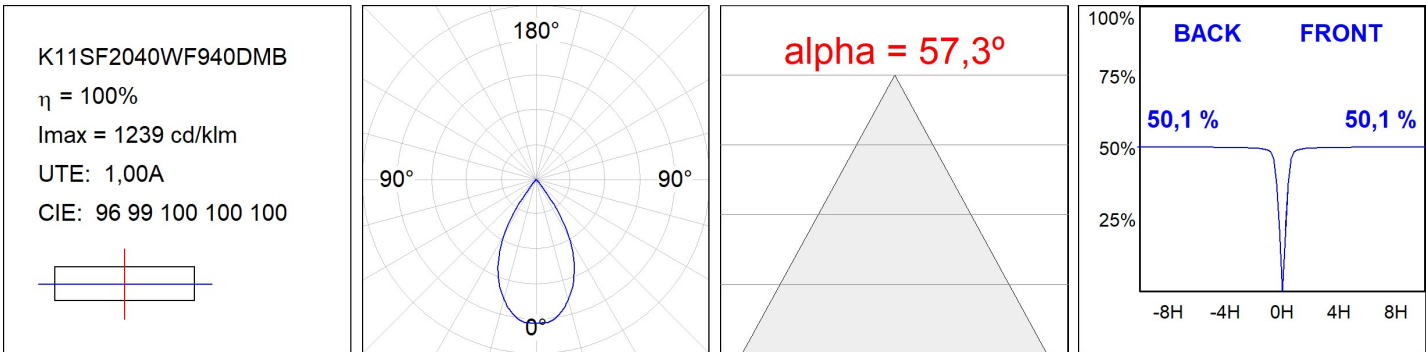

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH