

K11SF2040WF940DWW

- KOMBIC 100 SF 2000 IP43 9NW WFL DA WH/WH

Description:**Finition:** Blanc mat RAL 9010**SPÉCIFICATIONS TECHNIQUES:**

Flux lumineux:	1.519 lm	°K :	4000
Plum:	14W	IRC :	90
Efficacité:	108,5 lm/w	R9 :	59
UGR:	<19		
Type:	COB		
Durée de vie LED:	>100.000h L90 B10 (Ta=25°C)		
Puissance:	12,2W		

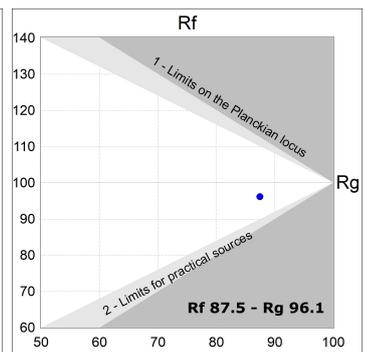
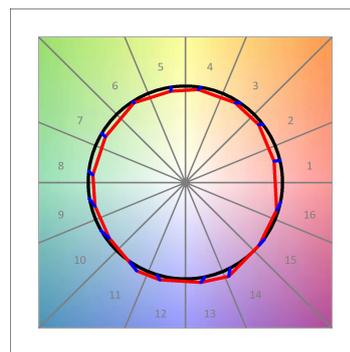
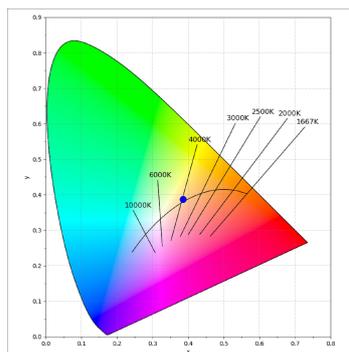
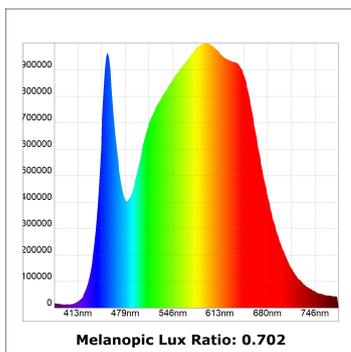
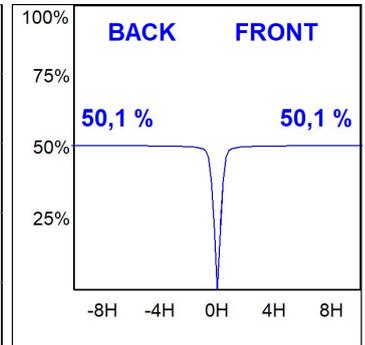
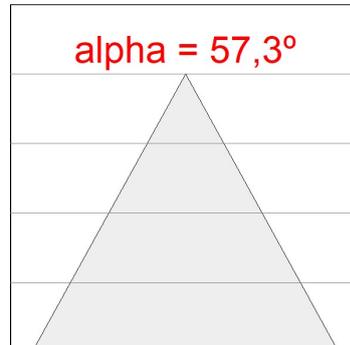

Tolérance de flux lumineux +/- 10%**OPTIONS PERSONNALISABLES:**

K11SF2040WF940DWW

KOMBIC 100 SF 2000 IP43 9NW WFL DA WH/WH

DONNÉES PHOTOMÉTRIQUES :

K11SF2040WF940DWW
 $\eta = 100\%$
 $I_{max} = 1239 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 96 99 100 100 100

ACCESSOIRES :

Suspension



Code produit:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Code produit:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH