## **KOMBIC 100 SURFACE**

K11SF2523RF830DBB

- KOMBIC 100 SF 2500 IP23 WW RF FL DA B/B

Description:

Finish: Matte black RAL 9011 Weight: 712 g

Installation: Surface

#### **TECHNICAL SPECIFICATIONS:**

| Light output: | 2.082 lm                 | ⁰K :          | 3000             |
|---------------|--------------------------|---------------|------------------|
| Plum:         | 20W                      | CRI :         | 80               |
| Efficacy:     | 93,4 lm/w                | R9 :          | 80               |
| UGR:          | <19                      | MacAdam:      | 3                |
| Туре:         | СОВ                      | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L70 B10 (Ta=25°C) | Gear:         | Adjustable DALI  |
| Power:        | 19W                      |               |                  |

Light output tolerance +/- 10%

EPD

CUSTOM MADE OPTIONS:



Worktitude for light


## **KOMBIC 100 SURFACE**

K11SF2523RF830DBB

KOMBIC 100 SF 2500 IP23 WW RF FL DA B/B



#### **PHOTOMETRIC DATA :**

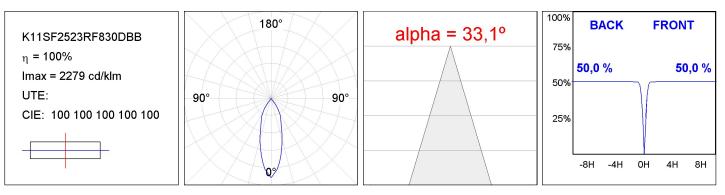

#### Product datasheet

# **KOMBIC 100 SURFACE**

### ACCESORIES :

### Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light