

## KOMBIC 100 SURFACE

K11SF2523RF830NMB

- KOMBIC 100 SF 2500 IP23 WW RF FL MA/BK

**Description:****Finish:** metalized polycarbonate mate**Weight:** 680 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.208 lm	<b>°K :</b>	3000
<b>Plum:</b>	21,6W	<b>CRI :</b>	80
<b>Efficacy:</b>	96,3 lm/w	<b>R9 :</b>	80
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	19W		


*Light output tolerance +/- 10%***CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF2523RF830NMB

KOMBIC 100 SF 2500 IP23 WW RF FL MA/BK

PHOTOMETRIC DATA :

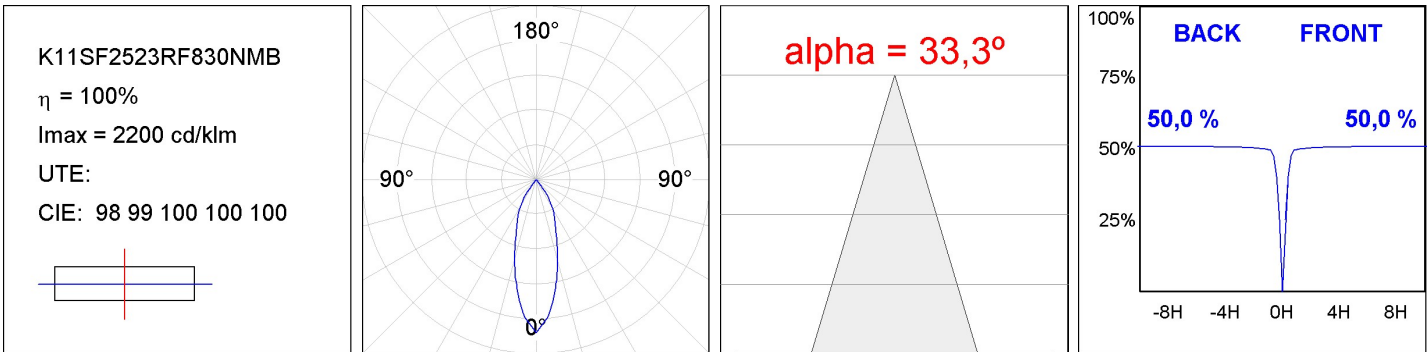

## KOMBIC 100 SURFACE

---

### ACCESORIES :

#### Suspension



**Product code:**

K11SUADLATBK

**Description:**

KOMBIC 100 SF ADAPT. LATERAL CABLE BK