

KOMBIC 100 SURFACE

K11SF2523RF840DMB

- KOMBIC 100 SF 2500 IP23 NW RF FL DA M/B

Description:**Finish:** metalized polycarbonate mate**Weight:** 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.318 lm	°K :	4000
Plum:	20W	CRI :	80
Efficacy:	109,2 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%




KOMBIC 100 SURFACE

K11SF2523RF840DMB

KOMBIC 100 SF 2500 IP23 NW RF FL DA M/B

PHOTOMETRIC DATA :

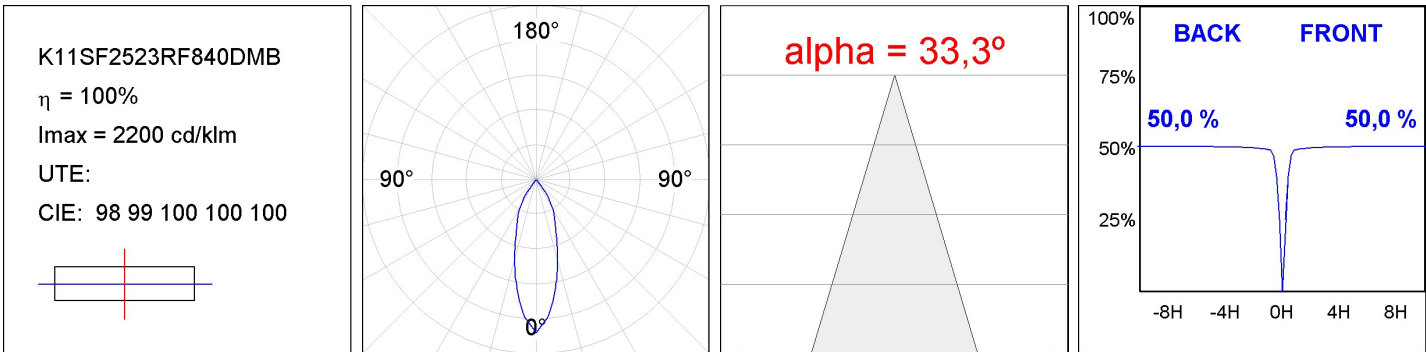

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK