

## KOMBIC 100 SURFACE

K11SF2523RF840DMW

- KOMBIC 100 SF 2500 IP23 NW RF FL DA M/W

**Description:****Finish:** metalized polycarbonate mate**Weight:** 712 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	2.318 lm	<b>°K :</b>	4000
<b>Plum:</b>	20W	<b>CRI :</b>	80
<b>Efficacy:</b>	109,2 lm/w	<b>R9 :</b>	80
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	19W		


**Light output tolerance +/- 10%**

KOMBIC 100 SURFACE

K11SF2523RF840DMW

KOMBIC 100 SF 2500 IP23 NW RF FL DA M/W

PHOTOMETRIC DATA :

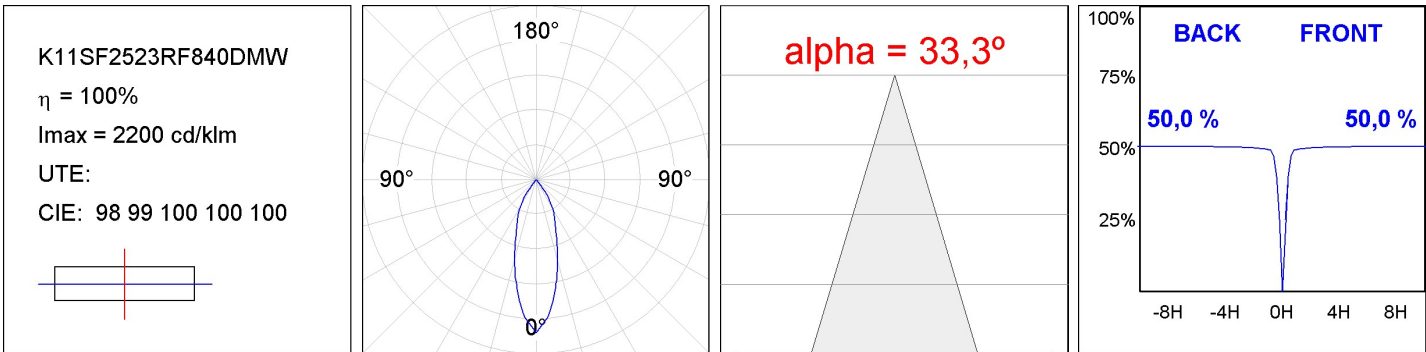

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK