Product datasheet

KOMBIC 100 SURFACE

LAMP
Worktitude for light

K11SF2523RF840NWB   –   **KOMBIC 100 SF 2500 IP23 NW RF FL WH/BK**

Description:

Finish: Matte white RAL 9010

Weight: 680 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.318 lm		**ºK :**	4000
Plum:	21,6W		**CRI :**	80
Efficacy:	107,3 lm/w		**R9 :**	80
UGR:	<19		**MacAdam:**	3
Type:	COB		**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)		**Gear:**	Electronic
Power:	19W			

Light output tolerance +/- 10%

EPD

K11SF2523RF840NWB   KOMBIC 100 SF 2500 IP23 NW RF FL WH/BK

PHOTOMETRIC DATA :

K11SF2523RF840NWB

η = 100%

Imax = 2200 cd/klm

UTE:

CIE: 98 99 100 100 100

alpha = 33,3º

BACK   FRONT

50,0 %   50,0 %

Data according to regulations 2019/2020/EU and 2019/2015/EU

LAMP
Worktitude for light
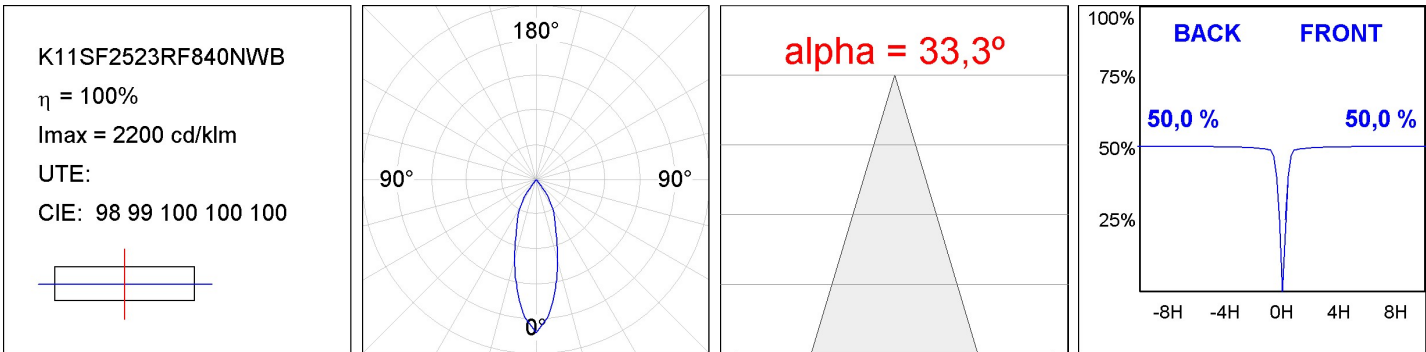
ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU