

KOMBIC 100 SURFACE

TECHNICAL DATA ON REVIEW

K11SF2523RF840NWW

KOMBIC 100 SF 2500 IP23 NW RF FL WH/WH

Description:

Finish: Matte white RAL 9010**Weight:** 680 g**Installation:** Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.318 lm	°K :	4000
Plum:	21,6W	CRI :	80
Efficacy:	107,3 lm/w	R9 :	80
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Electronic
Power:	19W		

Light output tolerance +/- 10%


KOMBIC 100 SURFACE

TECHNICAL DATA ON REVIEW

K11SF2523RF840NWW

KOMBIC 100 SF 2500 IP23 NW RF FL WH/WH

PHOTOMETRIC DATA :

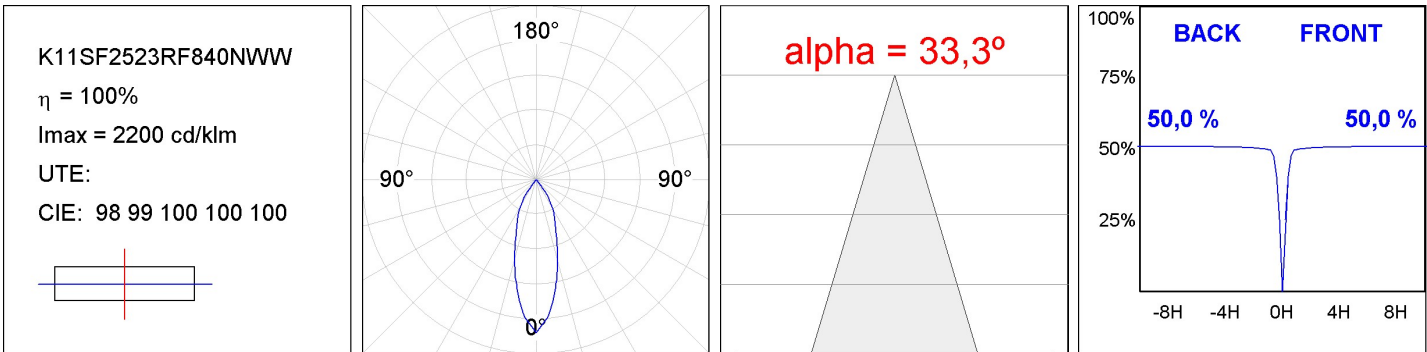

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH