

KOMBIC 100 SURFACE

K11SF2523RW830DMB

- KOMBIC 100 SF 2500 IP23 WW RF WFL DA M/B

Description:**Finish:** metalized polycarbonate mate**Weight:** 712 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	2.081 lm	°K :	3000
Plum:	20W	CRI :	80
Efficacy:	104 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF2523RW830DMB

KOMBIC 100 SF 2500 IP23 WW RF WFL DA M/B

PHOTOMETRIC DATA :

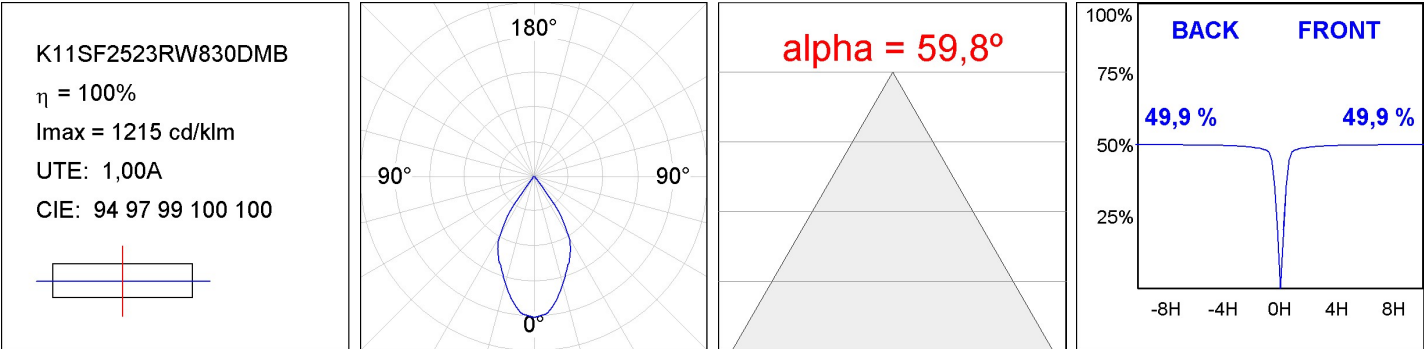

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH