

KOMBIC 100 SURFACE

K11SF2523RW830NMW

- KOMBIC 100 SF 2500 IP23 WW RF WFL MA/WH

Description:**Finish:** metalized polycarbonate mate**Weight:** 680 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	2.081 lm	°K :	3000
Plum:	21,6W	CRI :	80
Efficacy:	96,3 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Electronic
Power:	19W		


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF2523RW830NMW

KOMBIC 100 SF 2500 IP23 WW RF WFL MA/WH

PHOTOMETRIC DATA :

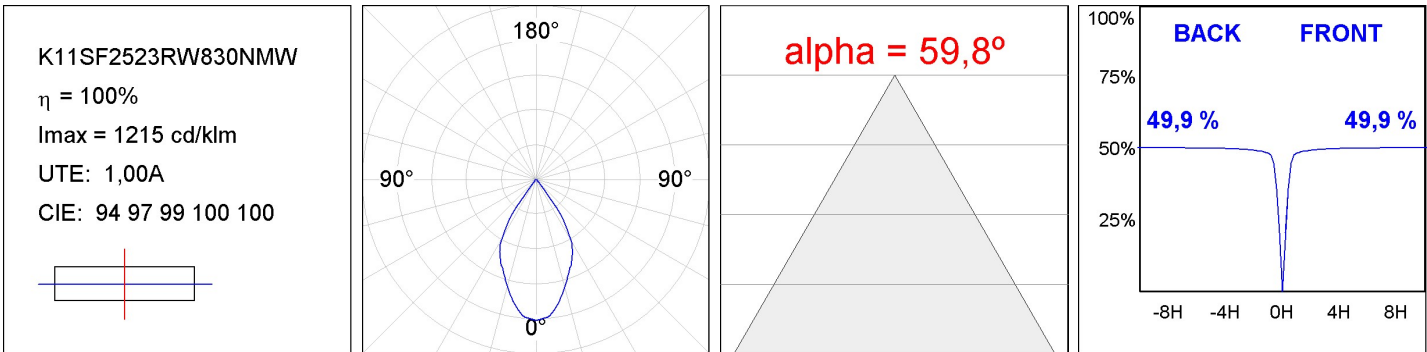

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH