KOMBIC 100 SURFACE

K11SF2523RW840DBW

- KOMBIC 100 SF 2500 IP23 NW RF WFL DA B/W

Description:

Finish: Matte black RAL 9011 Weight: 712 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	2.002 Im	⁰К:	4000
Plum:	20W	CRI :	80
Efficacy:	100,1 lm/w	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:




Worktitude for light


KOMBIC 100 SURFACE

K11SF2523RW840DBW

KOMBIC 100 SF 2500 IP23 NW RF WFL DA B/W



PHOTOMETRIC DATA :

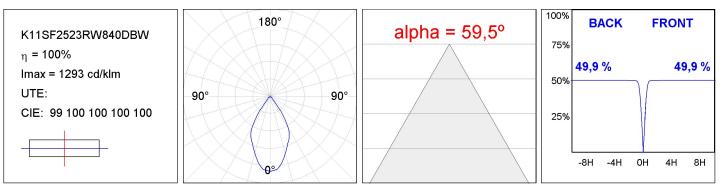

Worktitude for light

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light