

KOMBIC 100 SURFACE

K11SF2523RW840NWW

- KOMBIC 100 SF 2500 IP23 NW RF WFL WH/WH

**Description:****Finish:** Matte white RAL 9010**Weight:** 680 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 2.184 lm | °K : | 4000 |
| Plum: | 21,6W | CRI : | 80 |
| Efficacy: | 101,1 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L70 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 19W | | |


Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF2523RW840NWW

KOMBIC 100 SF 2500 IP23 NW RF WFL WH/WH

PHOTOMETRIC DATA :

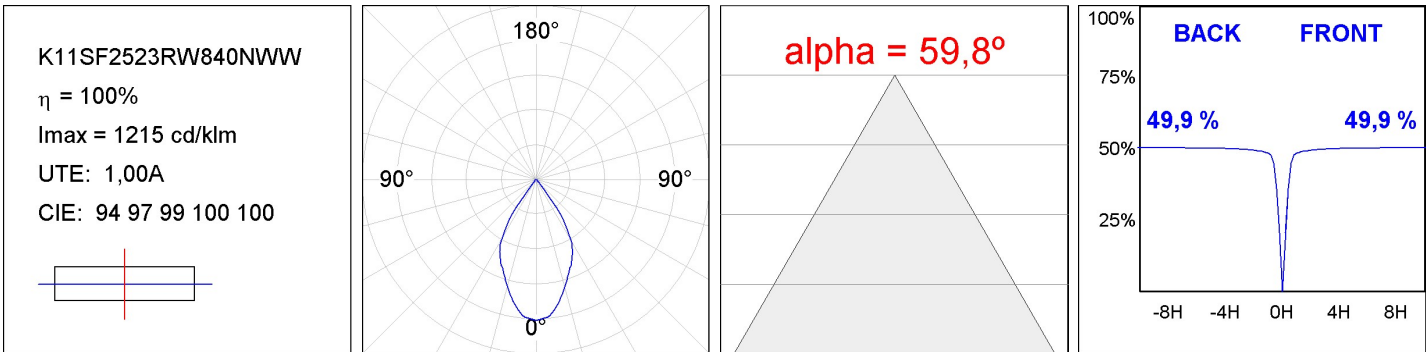

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH