Product datasheet

KOMBIC 100 SURFACE

K11SF2540WF840NWW

KOMBIC 100 SF 2500 IP43 NW WFL WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring included. Insolation Class I. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: Matte white RAL 9010

Weight: 680 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.802 lm	**ºK :**	4000
Plum:	19,7W	**CRI :**	80
Efficacy:	91,5 lm/w	**MacAdam:**	3
UGR:	<19	**Power Supply:**	220-240V 50/60Hz
Type:	COB	**Gear:**	Electronic
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)		
Power:	18W		

Light output tolerance +/- 10%

CLASE I | CRI >80 | IP 43 | LED 4000 K | PC | 650º

CE | EPD | GARANTIA 5 AÑOS | Group 0 En 62471

CUSTOM MADE OPTIONS:

1-10V | lm | LED RETAIL | PUSH | TRIAC | K

KOMBIC 100 SURFACE

K11SF2540WF840NWW **KOMBIC 100 SF 2500 IP43 NW WFL WH/WH**

PHOTOMETRIC DATA :

K11SF2540WF840NWW

η = 100%

Imax = 1265 cd/klm

UTE: 1,00A

CIE: 95 99 100 100 100



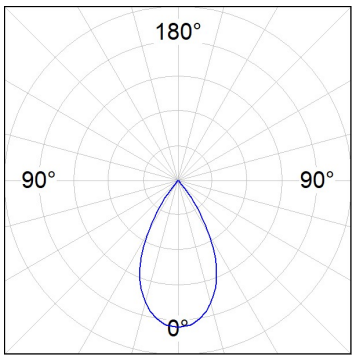

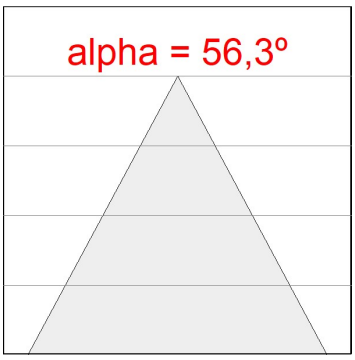

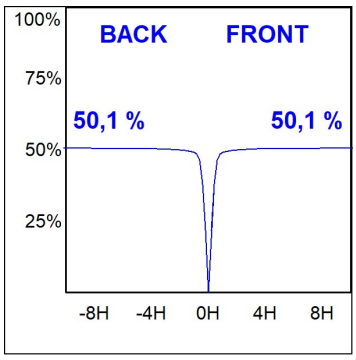

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

ACCESORIES :

Suspension

Product code:	Description:
K1SUCARG0500DB	KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 B
K1SUCARG0500NB	KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 B
K1SUCARG1000DB	KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M BK
K1SUCARG1000NB	KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M BK

Product code:	Description:
K1SUCARG0500DW	KOMBIC 100 SF ACC ELEC 5P RIGI SUS 0.5 W
K1SUCARG0500NW	KOMBIC 100 SF ACC ELEC 3P RIGI SUS 0.5 W
K1SUCARG1000DW	KOMBIC 100 SF ACC ELEC 5P RIGI SUS 1M WH
K1SUCARG1000NW	KOMBIC 100 SF ACC ELEC 3P RIGI SUS 1M WH

Product code:	Description:
K1SUCAWI2000DB	KOMBIC 100 SF ACC. ELEC 5P SUSP 2M BK.
K1SUCAWI2000NB	KOMBIC 100 SF ACC. ELEC 3P SUSP 2M BK.

Product code:	Description:
K1SUCAWI2000DW	KOMBIC 100 SF ACC. ELEC 5P SUSP 2M WH.
K1SUCAWI2000NW	KOMBIC 100 SF ACC. ELEC 3P SUSP 2M WH.

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU