


KOMBIC 100 DOWNLIGHT

K11SQ15400P930NWW



KOMBIC 100 SQ 1500 IP43 9WW OP WH/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety.

Finish: Matte white RAL 9010


Weight: 392 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.234 lm	°K :	3000
Plum:	13,4W	CRI :	90
Efficacy:	92,1 lm/w	R9 :	68
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12W	Gear:	Electronic

Light output tolerance +/- 10%

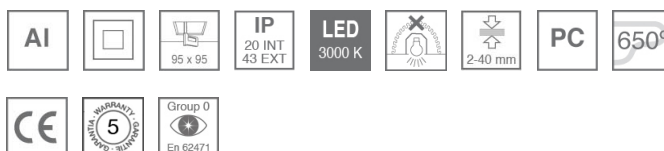

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ15400P930NWW

KOMBIC 100 SQ 1500 IP43 9WW OP WH/WH

PHOTOMETRIC DATA :

K11SQ15400P930NWW
 $\eta = 100\%$
 $I_{max} = 766 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 76 95 99 100 100

