


KOMBIC 100 DOWNLIGHT

K11SQ1540WF927DBB



KOMBIC 100 SQ 1500 IP43 9VWW WFL DA B/B

Description:

Square recessed downlight model KOMBIC 100 SQ 1500 IP40 9VWW WFL DA BK/BK, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in black finish, injected aluminium dissipator. Model for LED COB, with 2700K colour temperature, CRI 90 and control DALI gear included. IP20 protection rating. Optic Wide Flood to achieve a controlled light distribution and low glare level, less than UGR 17. Insulation class II.

Finish: Matte black RAL 9011


Weight: 442 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.031 lm	°K :	2700
Plum:	13,4W	CRI :	90
Efficacy:	76,9 lm/w	R9 :	60
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	12W		

Light output tolerance +/- 10%

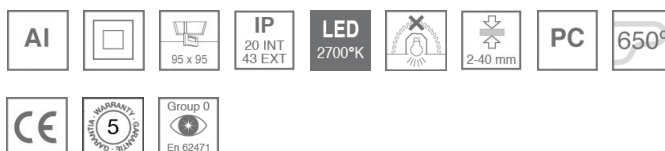

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ1540WF927DBB

KOMBIC 100 SQ 1500 IP43 9VWW WFL DA B/B

PHOTOMETRIC DATA :

K11SQ2040WF830NBB
 $\eta = 100\%$
 $I_{max} = 1269 \text{ cd/klm}$
 UTE:
 CIE: 98 100 100 100 100

