


KOMBIC 100 DOWNLIGHT

K11SQ1543WW927DBW

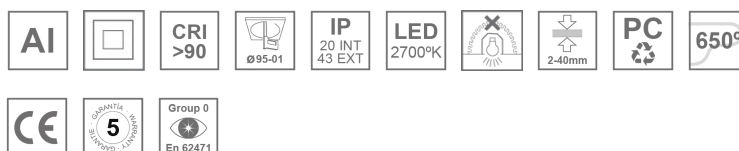
- KOMBIC 100 SQ 1500 IP43 9VWW WW DA BK/WH

**Description:**

LAMP Square recessed downlight KOMBIC 100 SQ 1500 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI90. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 50.000 L90 B10. Available finishes: White and black. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011**Weight:** 517 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 901 lm | °K : | 2700 |
| Plum: | 13,7W | CRI : | 90 |
| Efficacy: | 65,8 lm/w | R9 : | 58 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L90 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 13W | Gear: | Adjustable DALI |

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11SQ1543WW927DBW

KOMBIC 100 SQ 1500 IP43 9VWW WW DA BK/WH

PHOTOMETRIC DATA :

