


KOMBIC 100 DOWNLIGHT

K11SQ1543WW940DMW



KOMBIC 100 SQ 1500 IP43 9NW WW DA MA/WH

Description:

LAMP Square recessed downlight KOMBIC 100 SQ 1500 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI90. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 50. 000 L90 B10. Available finishes: White and black. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.


Finish: metalized polycarbonate mate

Weight: 517 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Plum: | 13,7W | °K : | 4000 |
| Type: | COB | CRI : | 90 |
| LED Lifetime: | 50.000 L90 B10 (Ta=25°C) | R9 : | 50 |
| Power: | 13W | MacAdam: | 3 |
| | | Power Supply: | 220-240V 50/60Hz |
| | | Gear: | Adjustable DALI |

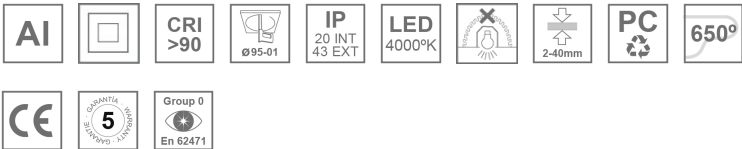

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ1543WW940DMW

KOMBIC 100 SQ 1500 IP43 9NW WW DA MA/WH

PHOTOMETRIC DATA :

