

## KOMBIC 100 DOWNLIGHT

K11SQ20400P830DRW



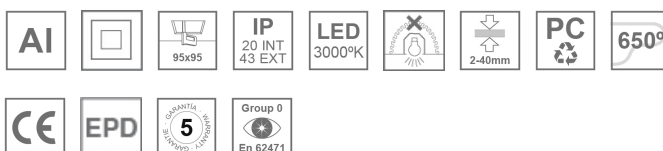
## KOMBIC 100 SQ 2000 IP43 WW OPAL DA BR/WH

**Description:**

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** BRILLIANT METALLIC POLYCARBONATE**Weight:** 392 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.486 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 13,4W                    | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 110,9 lm/w               | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 50.000 L80 B10 (Ta=25°C) | <b>Gear:</b>         | Adjustable DALI  |
| <b>Power:</b>        | 12W                      |                      |                  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11SQ20400P830DRW

KOMBIC 100 SQ 2000 IP43 WW OPAL DA BR/WH

PHOTOMETRIC DATA :

