


KOMBIC 100 DOWNLIGHT

K11SQ20400PWB3NRW



KOMBIC 100 SQ 1800 IP43 WBW OP BR/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE


Weight: 392 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.316 lm | °K : | 3000 |
| Plum: | 20W | CRI : | 95 |
| Efficacy: | 65,8 lm/w | R9 : | 99 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 60.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 17,2W | Gear: | Electronic |

Light output tolerance +/- 10%

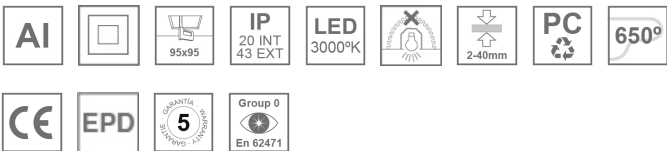

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ20400PWB3NRW

KOMBIC 100 SQ 1800 IP43 WBW OP BR/WH

PHOTOMETRIC DATA :

