


KOMBIC 100 DOWNLIGHT

K11SQ20400PWB3NRW



KOMBIC 100 SQ 1800 IP43 WBW OP BR/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE


Weight: 392 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.316 lm	°K :	3000
Plum:	20W	CRI :	95
Efficacy:	65,8 lm/w	R9 :	99
Type:	COB	MacAdam:	3
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	17,2W	Gear:	Electronic

Light output tolerance +/- 10%

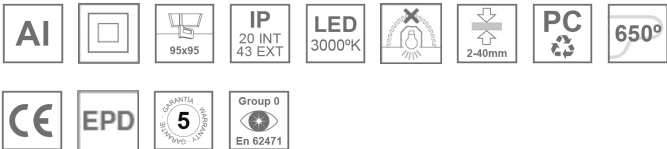

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ20400PWB3NRW

KOMBIC 100 SQ 1800 IP43 WBW OP BR/WH

PHOTOMETRIC DATA :

